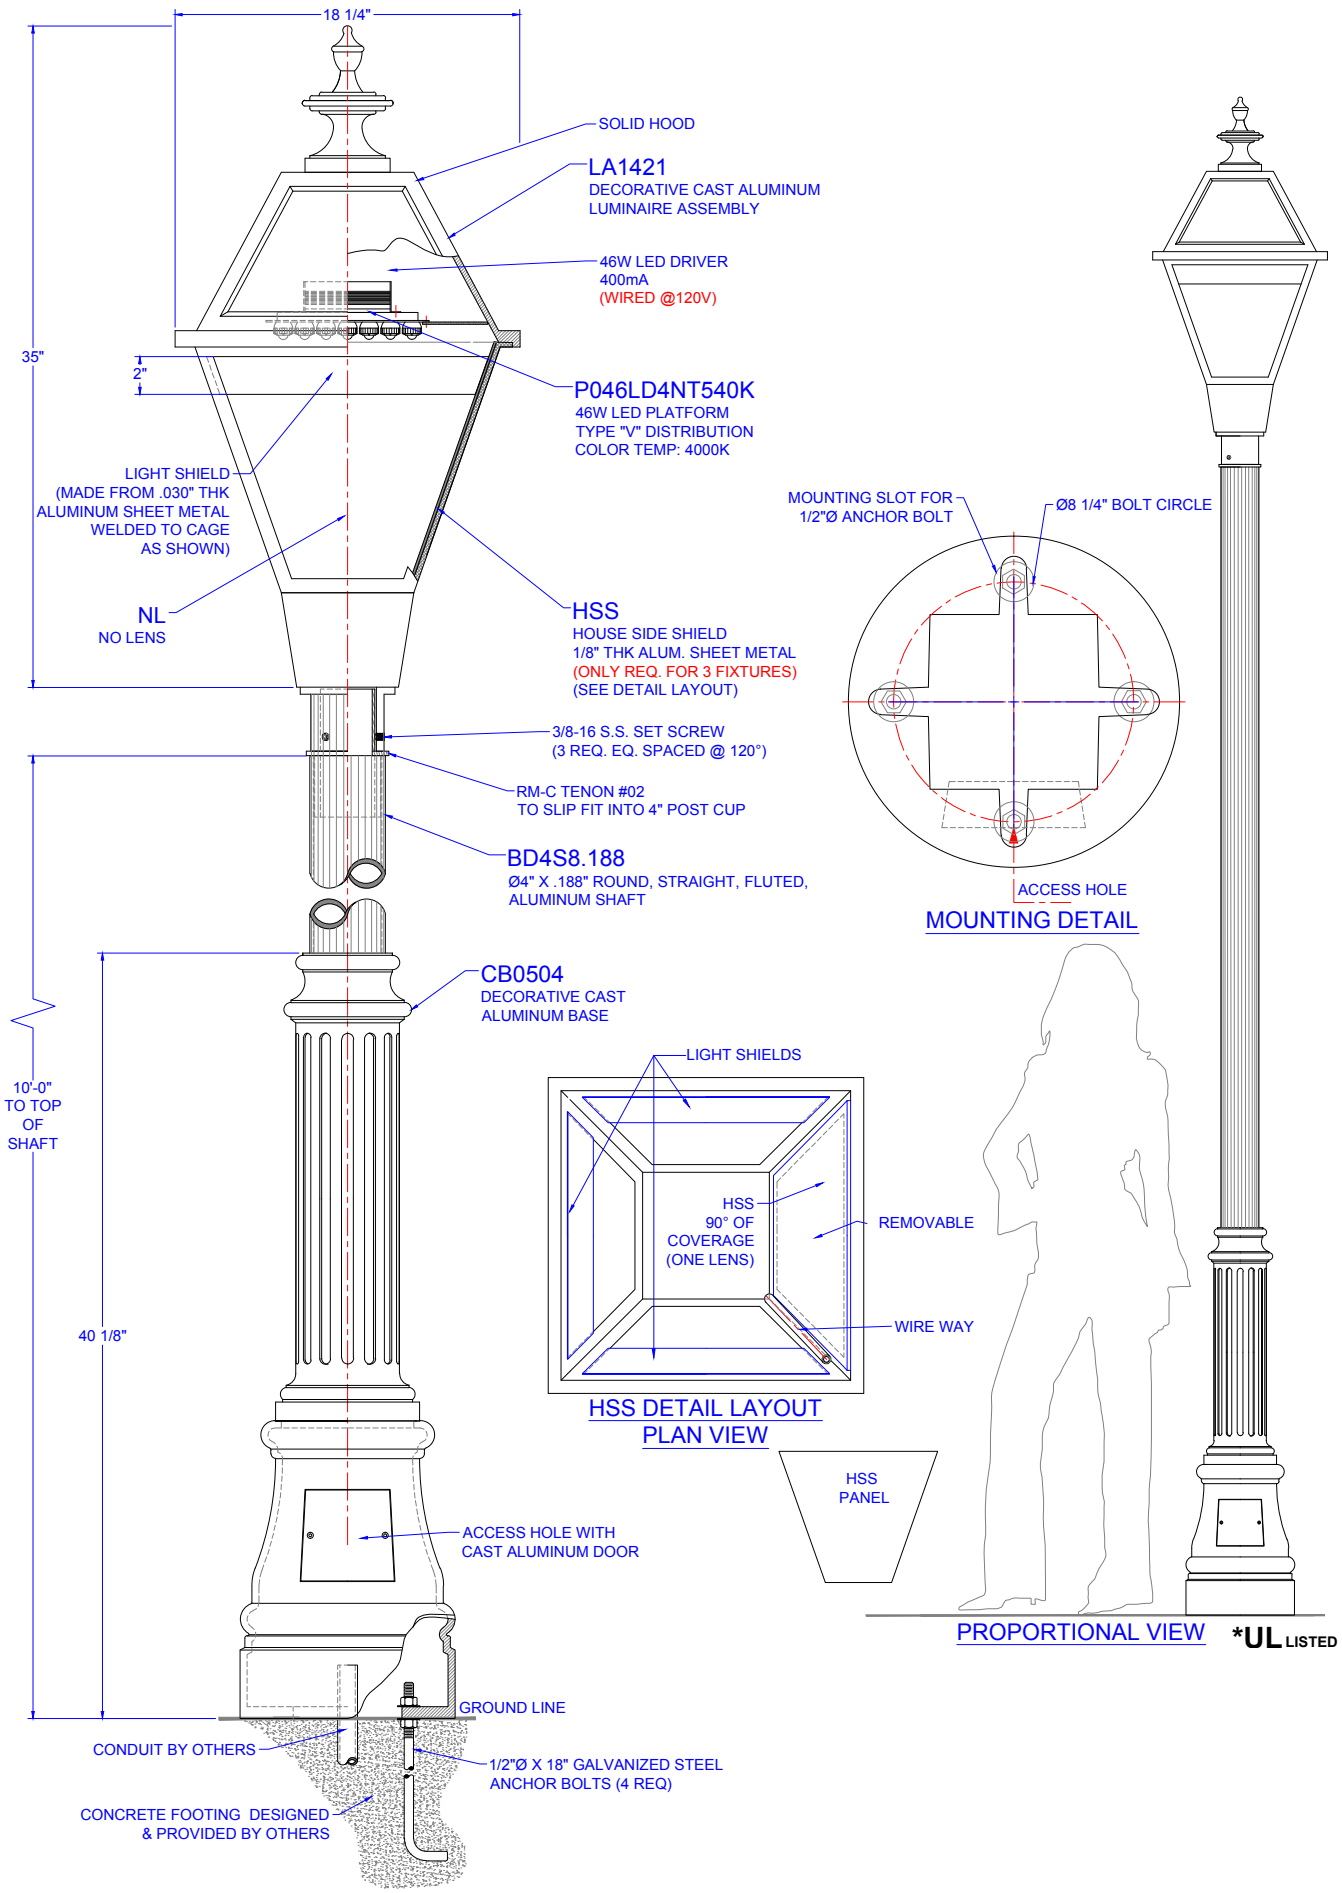
18 1/4"
35"
2"
SOLID HOOD
LA1421
DECORATIVE CAST ALUMINUM
LUMINAIRE ASSEMBLY
46W LED DRIVER
400mA
(WIRED @120V)
P046LD4NT540K
46W LED PLATFORM
TYPE "V" DISTRIBUTION
COLOR TEMP: 4000K
LIGHT SHIELD
(MADE FROM .030" THK
ALUMINUM SHEET METAL
WELDED TO CAGE
AS SHOWN)
NL
NO LENS
HSS
HOUSE SIDE SHIELD
1/8" THK ALUM. SHEET METAL
(ONLY REQ. FOR 3 FIXTURES)
(SEE DETAIL LAYOUT)
3/8-16 S.S. SET SCREW
(3 REQ. EQ. SPACED @ 120°)
RM-C TENON #02
TO SLIP FIT INTO 4" POST CUP
BD4S8.188
Ø4" X .188" ROUND, STRAIGHT, FLUTED,
ALUMINUM SHAFT
CB0504
DECORATIVE CAST
ALUMINUM BASE
10'-0"
TO TOP
OF
SHAFT
40 1/8"
ACCESS HOLE WITH
CAST ALUMINUM DOOR
GROUND LINE
CONDUIT BY OTHERS
1/2"Ø X 18" GALVANIZED STEEL
ANCHOR BOLTS (4 REQ)
CONCRETE FOOTING DESIGNED
& PROVIDED BY OTHERS
MOUNTING SLOT FOR
1/2"Ø ANCHOR BOLT
Ø8 1/4" BOLT CIRCLE
ACCESS HOLE
MOUNTING DETAIL
LIGHT SHIELDS
HSS
90° OF
COVERAGE
(ONE LENS)
REMOVABLE
WIRE WAY
HSS DETAIL LAYOUT
PLAN VIEW
HSS
PANEL
PROPORTIONAL VIEW
*UL LISTED