

Specifications

Material:
Durable A356 cast aluminum and aluminum sheet metal. Hardware is stainless steel or zinc-plated steel.

Fixture Mounting:
Pendant Mount: Hangs from tenon with Dual Clevis Pins.

Drivers:
Universal Voltage 120-277V is standard. 0-10V dimming is standard. (Refer to Driver Specification section for other specifications.)

Dark Sky Friendly:
To maintain dark sky friendly compatibility: ≤ 3000K

Electrical:
A lightning surge protective device is standard (20KA³ Max/10KA² Nominal). Approximately 12" of pull wire extends from luminaire. All luminaires are prewired with 0-10V dimming leads. Post Arms and Wall Mounts are also prewired with line voltage & dimming leads.

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

Finish:
A polyester powder coat high quality finish. Marine grade finish is available.


Certifications:
UL Listed for outdoor, wet location. LED is IP66.

Modifications:
Consult factory for custom or modified designs.

Buy American:
This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

BVB2002 LED

EPA: 1.05
Weight: 20 lbs.

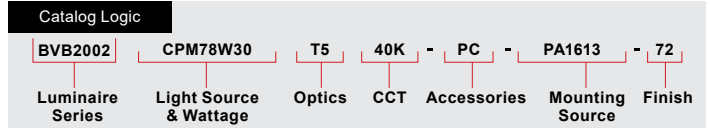

Catalog Number	1	2	3	4	5	6	7	8
BVB2002								

1	LIGHT SOURCE & WATTAGES
TIR Performance Platform	
CPS30W18	(30W TIR Performance Platform)
CPS39W18	(39W TIR Performance Platform, CA Title 24)
CPS46W18	(46W TIR Performance Platform)
CPM78W30	(78W TIR Performance Platform)
CPM90W36	(90W TIR Performance Platform)
CPL120W48	(120W TIR Performance Platform)
Edge-Lit LED Comfort Solution*	
E030LDS	(30W Small Edge-Lit LED Comfort Solution)
E039LDS	(39W Small Edge-Lit LED Comfort Solution, CA Title 24)
E050LDS	(50W Small Edge-Lit LED Comfort Solution)
E065LDS	(65W Small Edge-Lit LED Comfort Solution)
E080LDS	(80W Small Edge-Lit LED Comfort Solution)
*See LED Performance Charts for distribution type compatibility.	

2	OPTICS
T2	(Type II)
T3	(Type III)
T4	(Type IV)
T5	(Type V)

3	CCT (COLOR TEMPERATURE)
27K	(2700K)
30K	(3000K)
35K	(3500K)
40K	(4000K)
*Consult Factory for 5000K	

4	ACCESSORIES
HSS90	(90° House Side Shield)
HSS120	(120° House Side Shield)
*EMG-LED10	(10W LED Emergency Driver, See Below For Compatibility)
*EMG-LED20	(20W LED Emergency Driver, See Below For Compatibility)
*EMG-LED30	(30W LED Emergency Driver, See Below For Compatibility)
HLMSPC-06	(On/Off Motion Sensor/Photocell, High/Low field-configurable; 15' - 30' Sensor Mounting Height)
HLMSPC-10	(On/Off Motion Sensor/Photocell, High/Low field-configurable; 8' - 15' Sensor Mounting Height)
HLMSPC-FM	(High/Low Motion Sensor/Photocell, Flush Mount, integral to luminaire. 40' Max Sensor Mounting Height.)
PC	(Button Photo Cell)
TLPC	(ANSI C136.41 Twist Lock Photocell, includes receptacle and 120-277V photo cell)
TL5	(ANSI C136.41 5-Pin Twist Lock Receptacle only)
TL7	(ANSI C136.41 7-Pin Twist Lock Receptacle only)
AD	(AstroDIM™ - Night-time dimming, consult factory)
FAID	(Field Adjustable Internal Dimmer)
*Most Emergency Drivers are remote mount only (consult factory). 10W & 30W Emergency Drivers are not compatible with all LED Light Source and Wattages. For percent lumens in emergency mode, see Technical Section	

5	MOUNTING SOURCE
Post Mount Arms	
PA1613	WM1763
PA1753	WM1773
PA2613	WM3003
PA3113	WM3203
PA3213	WM2313
PA5153	WM5143
PA6213	WM5163
All Post Mounts	
Wall Mount Arms	
Rigid Stem Mount	
4ST36 (36" Rigid Stem, 4" OD Canopy) Other lengths available, consult factory.	
Pendant Chain Mount	
PEND-CH3 (36" Chain/4 5/8" OD Canopy) Other lengths available, consult factory.	
See last page for popular mounting sizes/styles.	

6	FINISHES					
*Premium and Marine Grade Finish have additional charges						
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*	
Aspen Green	10	10M	Copper Clay	53	53M	
Cantaloupe	11	11M	Silver	56	56M	
Lilac	12	12M	Black Verde	61	61M	
Putty	13	13M	Painted Chrome	70	70M	
Raw Unfinished	40	NA	Painted Copper	71	71M	
Black	41	41M	Textured Black	72	72M	
Forest Green	42	42M	Matte Black	73	73M	
Bright Red	43	43M	Textured Architectural Bronze	76	76M	
White	44	44M	Textured White	77	77M	
Bright Blue	45	45M	Textured Silver	78	78M	
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*	
Aqua Green	47	47M	Textured Desert	80	80M	
Galvanized	49	NA	Graystone	82	82M	
Navy	50	50M	Oil Rubbed Bronze	83	83M	
Architectural Bronze	51	51M	Carbon Graphite	96	96M	
Patina Verde	52	52M				
Consult Factory for additional paint charges and availability.						

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

TIR PERFORMANCE PLATFORM SPECIFICATION
• Performance, Ceramic-cooling technology
• Distributions: Type II, III, IV, V
• CCT: 2700K, 3000K, 3500K, 4000K
• Life: L70 >50,000 hours
• Ingress Protection: IP66
• Certification: ETL
• CRI: >80, 3 SDCM

EDGE-LIT LED SPECIFICATION
• Edge-Lit comfort solution
• Distributions: Type II, III, IV, V
• CCT: 2700K, 3000K, 3500K, 4000K
• Life: L70 >80,000 hours
• Ingress Protection: IP66
• Certification: UL, RoHS
• CRI: >80, 3 SDCM

DRIVER SPECIFICATION
• Universal Input 120-277V
• 0-10V Dimming to 10%
• Power Factor @ Full Load >95%
• THD @ Full Load <10%
• Constant Current Output 50/60Hz
• Operating Temperature: -40°C Minimum
• Ingress Protection: IP66
• Certifications: UL Recognized, CSA, RoHS

FINISHES
• A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
• Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray and is available in either a textured or gloss surface. 5-year warranty for aluminum products. 2-year warranty for steel products.

WARRANTY
See www.ANPlighting.com for complete fixture warranty.
LED warranty information
• 5 year limited warranty*
• *Limited Warranty: A typical year is defined as 4,380 hours of operation.

ACCESSORIES



HSS90 & HSS120



EMG-LED10, 20, 30



HLMSPC-06 & HLMSPC-10



PC



TLPC



TL5 & TL7



FAID



HLMSPC-FM

POPULAR POST MOUNTS

See Post Arm Section on Website for Specification Sheets and additional post arms. Dimensions are Projection x Height. [Click here for all Post Mount styles](#)



PA0413 / 28" x 38 3/8"



PA1613 / 26 1/2" x 55 1/8"



PA1753 / 26 1/8" x 36 3/4"



PA2023 / 21 1/4" x 16"



PA2313 / 24" x 28 1/2"



PA2613 / 39 1/2" x 46"



PA3113 / 25" x 15 1/4"



PA3213 / 21 7/8" x 26 1/8"



PA3533 / 29" x 38 1/2"



PA5153 / 14 1/4" x 19 3/4"



PA6213 / 22 3/4" x 26 1/2"



PA8453 / 70" x 37 1/2"

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

POPULAR WALL MOUNTS

See Wall Mount Section on Website for Specification Sheets and additional wall mount arms. Dimensions are Projections x Height. [Click here for all Wall Mount styles](#)



WM0413 / 26 1/2" x 38 5/8"



WM1613 / 28 3/8" x 57"



WM1763 / 28 3/4" x 42"



WM1773 / 20" x 30"



WM2313 / 23" x 31 7/8"




WM3003 / 11" x 8 7/8"



WM3203 / 18" x 24"



WM3553 / 28 1/4" x 36 1/2"



WM4513 / 17" x 8"



WM5143 / 14 3/4" X 16 1/2"



WM5163 / 15 3/4" x 13 3/4"



WM5603 / 17 7/8" x 14"

RIGID STEM MOUNT



4ST36

PENDANT CHAIN MOUNT



PEND-CH3

FINISHES COLORS

STANDARD



PREMIUM

