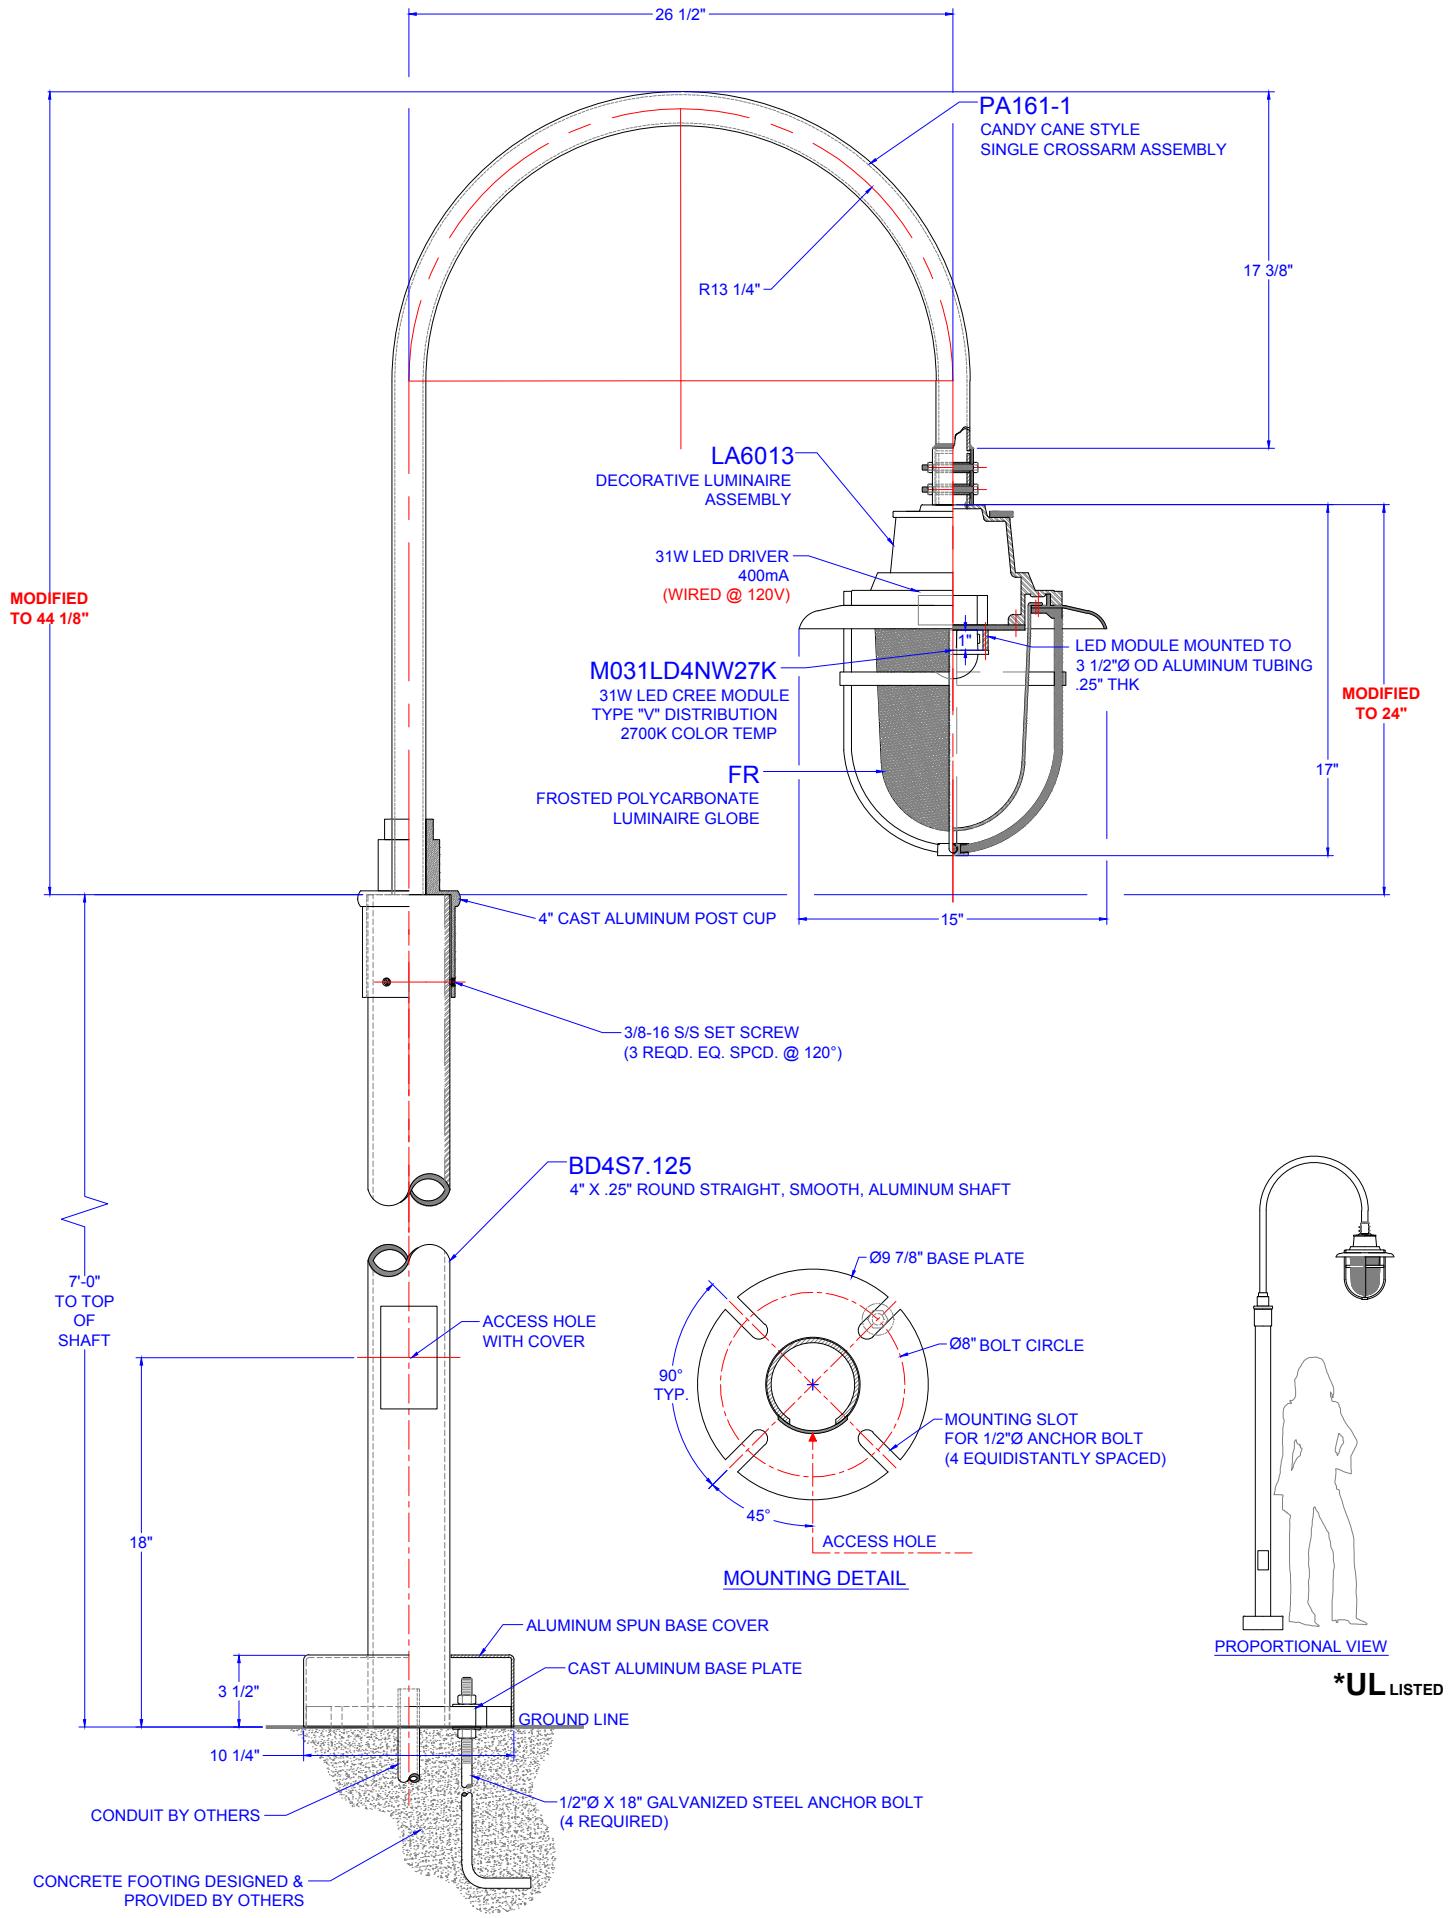
26 1/2"
PA161-1
CANDY CANE STYLE
SINGLE CROSSARM ASSEMBLY
R13 1/4"
17 3/8"
LA6013
DECORATIVE LUMINAIRE
ASSEMBLY
31W LED DRIVER
400mA
(WIRED @ 120V)
MODIFIED
TO 44 1/8"
1"
LED MODULE MOUNTED TO
3 1/2"Ø OD ALUMINUM TUBING
.25" THK
M031LD4NW27K
31W LED CREE MODULE
TYPE "V" DISTRIBUTION
2700K COLOR TEMP
MODIFIED
TO 24"
FR
FROSTED POLYCARBONATE
LUMINAIRE GLOBE
17"
4" CAST ALUMINUM POST CUP
15"
3/8-16 S/S SET SCREW
(3 REQD. EQ. SPCD. @ 120°)
BD4S7.125
4" X .25" ROUND STRAIGHT, SMOOTH, ALUMINUM SHAFT
7'-0"
TO TOP
OF
SHAFT
ACCESS HOLE
WITH COVER
Ø9 7/8" BASE PLATE
Ø8" BOLT CIRCLE
90°
TYP.
MOUNTING SLOT
FOR 1/2"Ø ANCHOR BOLT
(4 EQUIDISTANTLY SPACED)
45°
ACCESS HOLE
MOUNTING DETAIL
18"
ALUMINUM SPUN BASE COVER
CAST ALUMINUM BASE PLATE
3 1/2"
GROUND LINE
10 1/4"
CONDUIT BY OTHERS
1/2"Ø X 18" GALVANIZED STEEL ANCHOR BOLT
(4 REQUIRED)
CONCRETE FOOTING DESIGNED &
PROVIDED BY OTHERS
PROPORTIONAL VIEW
*UL LISTED