

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____



ILLUMINATING
ENGINEERING SOCIETY

Specifications



Material:
All parts are durable 356 cast aluminum and high strength aluminum extrusion. All mounting hardware shall be stainless steel or zinc plated steel.

Mounting:
Standard anchor bolts are 3/8" x 10" x 2". Bolts, nuts and washers shall be hot dipped galvanized steel. Bolt pattern diameter is 12".

Finish:
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Modifications:
Consult factory for custom or modified designs.

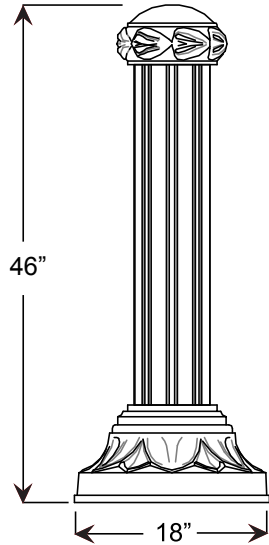

Weight: 37.0 lbs

Catalog Logic



BL0599

Catalog Number

1

2

BL0599

1 ACCESSORIES

IBOLT	(Eye Bolt)
GFI15	(15 amp GFCI receptacle outlet)
GFI20	(20 amp GFCI receptacle outlet)
GFI-WPU	(20 amp GFCI receptacle w/weather proof)

2 FINISHES

*Marine Grade Finish has an additional charge

Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Copper Clay	53	53M
Cantaloupe	11	11M	Silver	56	56M
Lilac	12	12M	Black Verde	61	61M
Putty	13	13M	Painted Chrome	70	70M
Raw Unfinished	40	NA	Painted Copper	71	71M
Black	41	41M	Textured Black	72	72M
Forest Green	42	42M	Matte Black	73	73M
Bright Red	43	43M	Textured Architectural Bronze	76	76M
White	44	44M	Textured White	77	77M
Bright Blue	45	45M	Textured Silver	78	78M
Sunny Yellow	46	46M			
Aqua Green	47	47M			
Galvanized	49	NA			
Navy	50	50M			
Architectural Bronze	51	51M			
Patina Verde	52	52M			

Consult Factory for additional paint charges and availability.

ACCESSORIES



IBOLT



GFI15 & GFI20



GFI-WPU