Specifications MCFT10

___ Quantity: _

5 1/4"
10"

Specifications





Project: __

Fixture Type: __ Customer:

RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match

Choice of clear, frosted or prismatic glass,

Electrical:

Medium Base Socket, 100w Maximum or GU24 Socket.

Approximately 12" of pull wire extends from fixure. Additional pull wire provided for post mount arms and wall mounts.

Catalog Logic

Certifications: Cord mounts are UL Listed for dry locations Arm mount, stem mount and wall mount are

A polyester powder coat high quality finish is electro-statically applied and baked at 430° For exceptional durability and color retention.

Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss

Modifications:

Consult factory for custom or modified designs.

MCFT10 100w Max

1/2" (13/16" OD) Rigid

*Arm mount, Wall mount or Stem finish will match fixture finish.

2ST6 2ST12 2ST18

2ST24 2ST36 2ST48

2ST60 2ST72 2ST96

3/4" (1" OD) Rigid Stems


3ST6 3ST12 3ST18

3ST24 3ST36 3ST48

3ST60 3ST72 3ST96

Weight: 1.0 lb

MCFT10 - MB - E6 - 100GLCL - CBC - 72 RLM Light Mounting Glass & **Medium Base** Accessories Finish Style Source Source Guards Catalog Number 1 2 3 4 5

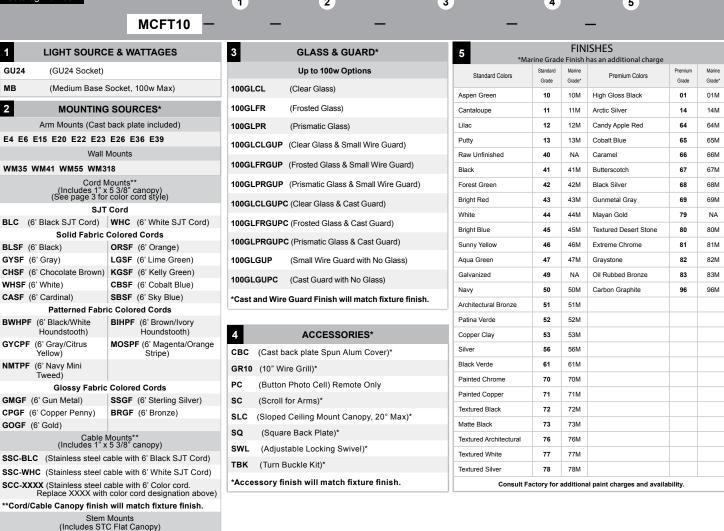

See www.ANPlighting.com for complete fixture warranty

Project:	
Fixture Type:	Quantity:
Customer:	•









GMGF | Gun Metal

Project:	
Fixture Type:	Quantity:
Customer:	



SSGF | Sterling Silver

CPGF | Copper Penny

BRGF | Bronze

GOGF | Gold