

Specifications OSPB12









3-Light Cluster

Project: _ _____ Quantity: _ Fixture Type: __

Specifications

Material: RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match

Customer:

Glass: Choice of clear, frosted or prismatic glass is optional. (Not available with 3-light)

Electrical: Medium Base Socket, 200w Maximum or GU24 Socket.

Approximately 12" of pull wire extends from fixure. Additional pull wire provided for post mount arms and wall mounts.

Certifications:

Cord mounts are UL Listed for dry locations. Arm mount, stem mount and wall mount are UL Listed for wet locations.

Made in USA UL Male in USA Illuminating

Finish:

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss

Modifications: Consult factory for custom or modified designs.

FINISHES

OSPB12 200w Max **Medium Base**

OSPB12

Medium Base

Weight: 9.5 lbs

Catalog Logic OSPB12 - MB - E6 - CBC - 100GLCL - 72 - 72 - 72 Finish Inside Shade 3-light Lamp Mounting Accessories RI M Glass Finish Cluster Finish Style Base Source



1	LAMP BASE
МВ	(Medium Base)
GU24	(GU24 Base)
3MBSS	(3-light medium base straight cluster, small)
2	MOUNTING SOURCES*
	Arm Mounts (Cast back plate included)

2 MOUNTING SOURCES*	
Arm Mounts (Cast back plate included)	
E3 E4 E6 E7 E8 E9 E10 E11 E12 E18	
Wall Mount	
WM55	
Cable Mounts** (Includes 1" x 5 3/8" canopy)	
SSC-BLC (Stainless steel cable with 6' Black SJT Cord))
SSC-WHC (Stainless steel cable with 6' White SJT Cord)
SSC-XXXX (Stainless steel cable with 6' Color cord. Replace XXXX with color cord designation below)	
**Cord/Cable Canopy finish will match fixture finish.	
S IT Cord	

GYSF (6' Gray) CHSF (6' Chocolate Brown) WHSF (6' White) CASF (6' Cardinal) Patterned Fabric Colored Cords BWHPF (6' Black/White Houndstooth) GYCPF (6' Gray/Citrus Yellow) NMTPF (6' Navy Mini Tweed) LGSF (6' Lime Green) KGSF (6' Kelly Green) CBSF (6' Cobalt Blue) SBSF (6' Cobalt Blue) SBSF (6' Cobalt Blue) SBSF (6' Cobalt Blue) SBF (6' Sky Blue) Patterned Fabric Colored Cords BHPF (6' Brown/Ivory Houndstooth) MOSPF (6' Magenta/Orange Stripe)	BLSF (6' Black)	ORSF (6' Orange)			
WHSF (6' White) CASF (6' Cardinal) Patterned Fabric Colored Cords BWHPF (6' Black/White Houndstooth) GYCPF (6' Gray/Citrus Yellow) NMTPF (6' Navy Mini) CBSF (6' Cobalt Blue) SBF (6' Cobalt Blue) SBF (6' Cy Nay Blue) SBF (6' Sky Blue) HHPF (6' Srown/Ivory Houndstooth) MOSPF (6' Magenta/Orange Stripe)	GYSF (6' Gray)	LGSF (6' Lime Green)			
CASF (6' Cardinal) Patterned Fabric Colored Cords BWHPF (6' Black/White Houndstooth) GYCPF (6' Gray/Citrus Yellow) NMTPF (6' Navy Mini	CHSF (6' Chocolate Brown)	KGSF (6' Kelly Green)			
Patterned Fabric Colored Cords BWHPF (6' Black/White Houndstooth) GYCPF (6' Gray/Citrus Yellow) NMTPF (6' Navy Mini	WHSF (6' White)	CBSF (6' Cobalt Blue)			
BWHPF (6' Black/White Houndstooth) GYCPF (6' Gray/Citrus Yellow) NMTPF (6' Navy Mini BIHPF (6' Brown/Ivory Houndstooth) MOSPF (6' Magenta/Orange Stripe)	CASF (6' Cardinal)	SBSF (6' Sky Blue)			
Houndstooth) GYCPF (6' Gray/Citrus Yellow) NMTPF (6' Navy Mini Houndstooth) MOSPF (6' Magenta/Orange Stripe)	Patterned Fabric Colored Cords				
Yellow) Stripe) NMTPF (6' Navy Mini					

Glossy Fabric Colored Cords

SSGF (6' Sterling Silver) BRGF (6' Bronze)

GMGF (6' Gun Metal)

CPGF (6' Copper Penny)

BLC (6' Black SJT Cord) WHC (6' White SJT Cord) Solid Fabric Colored Cords

GOGF (6' Gold)			
Stem Mounts (Includes STC Flat Canopy)			
1/2" (13/16" OD) Rigid	3/4" (1" OD) Rigid Stems		
2ST6 2ST12 2ST18	3ST6 3ST12 3ST18		
2ST24 2ST36 2ST48	3ST24 3ST36 3ST48		
2ST60 2ST72 2ST96	3ST60 3ST72 3ST96		
*Arm mount, Wall mount or Stem finish will match fixture finish.			

3	ACCESSORIES*
СВС	(Cast back plate Spun Alum Cover)*
SLC	(Sloped Ceiling Mount Canopy, 20° Max)*
sq	(Square Back Plate)*
твк	(Turn Buckle Kit)*
*Accessory finish will match fixture finish.	


4	(Not available with 3-light)
	Up to 100w Only
100GLCL	(Clear Glass)
100GLFR	(Frosted Glass)
100GLPR	(Prismatic Glass)
100GLCLGUP	(Clear Glass & Small Wire Guard)
100GLFRGUP	(Frosted Glass & Small Wire Guard)
100GLPRGUP	(Prismatic Glass & Small Wire Guard)
100GLCLGUP	C(Clear Glass & Cast Guard)
100GLFRGUP	(Frosted Glass & Cast Guard)
100GLPRGUP	(Prismatic Glass & Cast Guard)
100GLGUP	(Small Wire Guard with No Glass)
100GLGUPC	(Cast Guard with No Glass)
*Cast and Wir	e Guard Finish will match fixture finish.

Standard Colors	Standard Grade	Marine	Premium Colors	Premium Grade	Marine Grade*
Aspen Green	10	10M	High Gloss Black	01	01M
Cantaloupe	11	11M	Arctic Silver	14	14M
Lilac	12	12M	Candy Apple Red	64	64M
Putty	13	13M	Cobalt Blue	65	65M
Raw Unfinished	40	NA	Caramel	66	66M
Black	41	41M	Butterscotch	67	67M
Forest Green	42	42M	Black Silver	68	68M
Bright Red	43	43M	Gunmetal Gray	69	69M
White	44	44M	Mayan Gold	79	NA
Bright Blue	45	45M	Textured Desert Stone	80	80M
Sunny Yellow	46	46M	Extreme Chrome	81	81M
Aqua Green	47	47M	Graystone	82	82M
Galvanized	49	NA	Oil Rubbed Bronze	83	83M
Navy	50	50M	Carbon Graphite	96	96M
Architectural Bronze	51	51M			
Patina Verde	52	52M			
Copper Clay	53	53M			
Silver	56	56M			
Black Verde	61	61M			
Painted Chrome	70	70M			
Painted Copper	71	71M			
Textured Black	72	72M			
Matte Black	73	73M			
Textured Architectural Bronze	76	76M			
Textured White	77	77M			
Textured Silver	78	78M			


WARRANTY

See www.ANPlighting.com for complete fixture warranty.

Project:	
Fixture Type:	Quantity:
,,	Quantity:
Customer:	

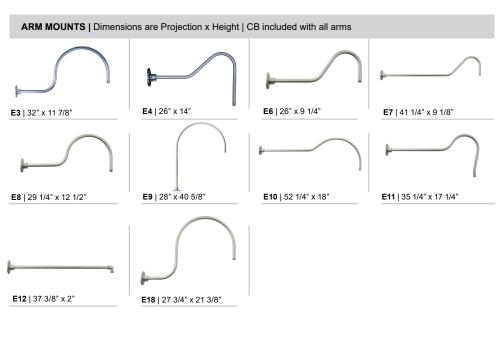







Project: _____ Quantity: _____ Customer:

All fabric Color Cords are three conductor, 1/4" diameter





