
ANPLighting

Specifications VW518

| | | | | I | Project: | | | | | | | |
|--|---|---|---|--|----------------------------------|--|---|---|--|-------------|------------|--|
| | Fixture Type: | | | | | Quantity: | | | | | | |
| <i>a</i> • | Customer: | | | | | | | | | | | |
| | Specifications | | | | | 💮 🎉 😳 🕅 🗤 | | | | | | |
| | | Material: | | | | | Finish: | | | | | |
| | | | RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match | | | | A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. | | | | | |
| | 9" | 0 0 0 | | paint. Glass: Choice of clear, fr | rosted or prisr | natic class | humic | dity an | le finish provides s d UV protection. T up to 3000 hours o | his coa | ating | |
| | | | | Electrical: Medium Base Soo | | Ū | salt s | pray, c s availa | omes with a 5-yea able in either a tex | r warra | nty | |
| | | – 18" — | > | GU24 Socket. Approximately 12 fixure. Additional mount arms and y | " of pull wire of pull wire prov | | Modi | ficatio ult fact | ns: ory for custom or i | nodified | t | |
| VW518 | Weight: 2.0 lbs | | | Certifications: UL Listed for dry | | | | | | | | |
| 200w Max | | | Catalog Logic | VW518 | - <u>MB</u> - <u>E</u> | 61 | 1000 | BLCL - CBC | - 7 | 2 | | |
| Medium Base | | | | | RLM Style | Light Mour Source Sou | | Glas: Guai | | es Fin | ish | |
| Catalog Number | | 1 | 2 | | 3 | | 4 | | 5 | | | |
| | VW518 — | - | | - | | - | | - | - | | | |
| 1 LIGHT SOU | RCE & WATTAGES | 3 | GLASS & G | UARD* | | 4 | AC | CES | SORIES* | | | |
| GU24 (GU24 Socket) | | | Up to 100w O | ptions | | CBC (Cast ba | ck plate | Spun | Alum Cover)* | | | |
| MB (Medium Base Socket, 200w Max) | | 100GLCL (Clear Glass) | | | | GR18 (18" Wire Grill)* | | | | | | |
| 2 MOUNTING SOURCES* | | 100GLFR (Frosted Glass) | | | | PC (Button Photo Cell) Remote Only SC (Scroll for Arms)* | | | | | | |
| Arm Mounts (Cast back plate included) | | 100GLPR | 100GLPR (Prismatic Glass) | | | | SC (Scroll for Arms)* SLC (Sloped Ceiling Mount Canopy, 20° Max)* | | | | | |
| E3 E4 E6 E8 E9 E10 E11 E12 E15 E18 E24 E25 Wall Mounts | | 100GLCLGUP (Clear Glass & Small Wire Guard) SQ (Square Back Plate)* | | | | | | | | | | |
| WM35 WM41 WM55 WM318 | | 100GLFRGUP (Frosted Glass & Small Wire Guard) SWL (Adjustable Locking Swivel)* | | | | | | | | | | |
| Post Mounts | | 100GLPRGUP (Prismatic Glass & Small Wire Guard) TBK (Turn Buckle Kit)* | | | | | | | | | | |
| PM10 PM20 PM30 PM40 PM50 PM319 | | 100GLCLGUPC (Clear Glass & Cast Guard) *Accessory finish will match fixture finish. | | | | | | | | | | |
| Cord Mounts** (Includes 1" x 5 3/8" canopy) (See page 3 for color cord style) | | 100GLFRGUPC (Frosted Glass & Cast Guard) | | | | | | | | | | |
| SJT Cord | | 100GLPRGUPC (Prismatic Glass & Cast Guard) | | | | 5 FINISHES | | | | | | |
| BLC (6' Black SJT Cord) WHC (6' White SJT Cord) Solid Fabric Colored Cords | | 100GLGUP (Small Wire Guard with N | | , | "We | | Marine Grad Standard | rine Grade Finish has an additional charge Standard Marine Premium Colors Premium | | | Marine | |
| BLSF (6' Black) | ORSF (6' Orange) | | | , | | Aspen Green | Grade | 10M | High Gloss Black | Grade 01 | Grade* | |
| GYSF (6' Gray) | LGSF (6' Lime Green) | 100GLGUPC | (Cast Guard with | n No Glass) | | Cantaloupe | 10 | 11M | Arctic Silver | 14 | 14M | |
| CHSF (6' Chocolate Brown) WHSF (6' White) | KGSF (6' Kelly Green) CBSF (6' Cobalt Blue) | AC | (Stipple Glass A | .corn) | | Lilac | 12 | 12M | Candy Apple Red | 64 | 64M | |
| CASF (6' Cardinal) | SBSF (6' Sky Blue) | 100GLBG | (White Ball Glass | s) | | Putty Raw Unfinished | 13 40 | 13M NA | Cobalt Blue Caramel | 65 66 | 65M 66M | |
| | abric Colored Cords | | Up to 200w O | ptions | | Black | 41 | 41M | Butterscotch | 67 | 67M | |
| BWHPF (6' Black/White Houndstooth) | BIHPF (6' Brown/Ivory Houndstooth) | 200GLCL | (Clear Glass) | | | Forest Green | 42 | 42M | Black Silver | 68 | 68M | |
| GYCPF (6' Gray/Citrus | MOSPF (6' Magenta/Orange | 200GLFR | (Frosted Glass) | | | Bright Red White | 43 | 43M 44M | Gunmetal Gray | 69 79 | 69M | |
| Yellow) NMTPF (6' Navy Mini | Stripe) | 200GLPR | (Prismatic Glass | | | Bright Blue | 44 | 44W | Mayan Gold Textured Desert Stone | 80 | 80M | |
| Tweed) | | | | | | Sunny Yellow | 46 | 46M | Extreme Chrome | 81 | 81M | |
| Glossy Fa GMGF (6' Gun Metal) | bric Colored Cords SSGF (6' Sterling Silver) | 200GLCLGUP | (Clear Glass & La | arge Wire Guard) | | Aqua Green Galvanized | 47 | 47M | Graystone | 82 | 82M 83M | |
| CPGF (6' Copper Penny) | BRGF (6' Bronze) | 200GLFRGUP | (Frosted Glass & | Large Wire Guard) | | Navy | 50 | 50M | Oil Rubbed Bronze Carbon Graphite | 83 96 | 96M | |
| GOGF (6' Gold) | | 200GLPRGUP | (Prismatic Glass | & Large Wire Guar | d) | Architectural Bronze | 51 | 51M | | | | |
| | ble Mounts** 1" x 5 3/8" canopy) | 200GLCLGUP | C (Clear Glass & L | arge Cast Guard) | | Patina Verde | 52 | 52M | | | | |
| SSC-BLC (Stainless steel cable with 6' Black SJT Cord) | | 200GLERGUP | C (Frosted Glass & | & Large Cast Guard |) | Copper Clay Silver | 53 | 53M 56M | | | | |
| SSC-WHC (Stainless steel cable with 6' White SJT Cord) | | 200GLFRGUPC (Frosted Glass & I | | | | Black Verde | 61 | 61M | | | | |
| SCC-XXXX (Stainless steel cable with 6' Color cord. Replace XXXX with color cord designation above) | | 200GLPRGUP | C (Prismatic Glass | s & Large Cast Gua | ra) | Painted Chrome | 70 | 70M | | | | |
| **Cord/Cable Canopy finish will match fixture finish. | | 200GLGUP | (Large Wire Gua | ard with No Glass) | | Painted Copper Textured Black | 71 | 71M 72M | | | | |
| Stem Mounts (Includes STC Flat Canopy) | | 200GLGUPC | (Large Cast Gua | ard with No Glass) | | Matte Black | 73 | 73M | | | | |
| 1/2" (13/16" OD) Rigid | 3/4" (1" OD) Rigid Stems | *Cast and Wire | e Guard Finish wi | ill match fixture fin | nish. | Textured Architectural | 76 | 76M | | | | |
| 2ST6 2ST12 2ST18 2ST24 2ST36 2ST48 | 3ST6 3ST12 3ST18 3ST24 3ST36 3ST48 | | | | | Textured White Textured Silver | 77 | 77M 78M | | | | |
| 2ST60 2ST72 2ST96 | 3ST60 3ST72 3ST96 | | WARRANIY | | | | Factory for additional paint charges and availability. | | | | | |
| *Arm mount, Wall mount or finish. | Stem finish will match fixture | See www.ANF | ingritting.com for c | complete fixture wa | nanty | - | | | | | | |
| | | | | | | | | | | | | |

© 2019 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products. 08012019

Specifications VW518

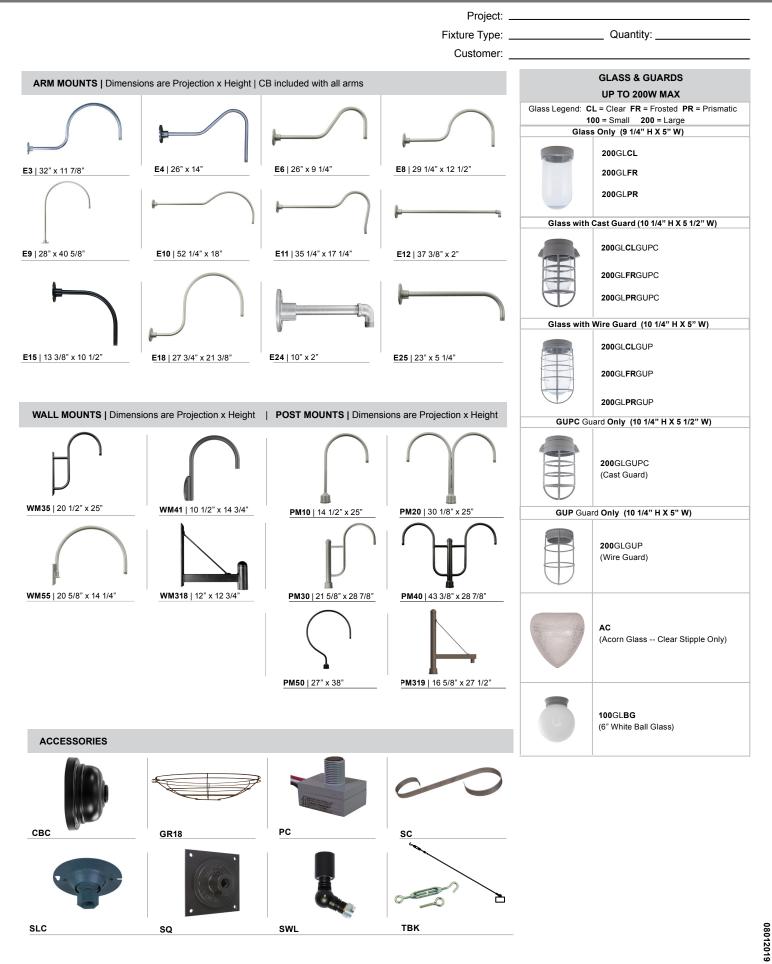

© 2019 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.



© 2019 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

1-800-548-3227 ANPlighting.com