

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_



**Specifications**

**Material:**  
 All parts are durable 356 cast aluminum. All hardware provided shall be stainless steel or zinc plated steel.

Available with direct burial fluted or smooth poles. For tapered poles consult factory.

Fits pole diameters: 3" and 4" - direct burial only.

**Finish:**  
 A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**Modifications:**  
 Consult factory for custom or modified cast clam shell.

**CCS1607**

Weight: 21 lbs

Catalog Logic

<b>CCS1607</b>	-	<b>DB3S10.125</b>	-	<b>GFI20</b>	-	<b>72</b>
Cast Clam Shell		Pole		Accessory		Finish

Catalog Number	1	2	3
	<b>CCS1607</b>		

**1 POLES**

SELECT POLE PART NUMBER FROM SPECS ON PAGES 2 AND 3.

**2 ACCESSORIES**

<b>GFI15</b>	(15 Amp GFCI receptacle outlet)	
<b>GFI20</b>	(20 Amp GFCI receptacle outlet)	
<b>GFI-WPU</b>	(20 Amp GFCI receptacle with weather proof in-use cover)	
<b>BAA</b>	(Cast Banner Arm A for 24" wide banner)	
<b>BAB</b>	(Cast Banner Arm B for 30" wide banner)	
<b>BAC</b>	(Cast Banner Arm C for 30" wide banner)	
<b>LR1</b>	(Cast Ladder Rest 1)	
<b>LR3</b>	(Cast Ladder Rest 3)	
<b>LR4</b>	(Cast Ladder Rest 4)	
<b>LR5</b>	(Cast Ladder Rest 5)	
<b>SIGN A</b>	(Cast Sign A; 30" x 9", 8 letters/numbers on one line; requires Banner Arm to hang)	
<b>SIGN B</b>	(Cast Sign B; 31" x 7", 12 letters/numbers on one line; requires Banner Arm to hang)	
<b>SIGN C</b>	(Cast Sign C; 27" x 11", two rows of 8 letters/numbers on each line, requires Banner Arm to hang)	
<b>SIGN D</b>	(Cast Sign D; 11" x 6 1/2", 4 letters/numbers on one line)	
<b>SIGN E</b>	(Cast Sign E; comes with pole clamp, 24 1/2" x 6", 9 letters/numbers on one line)	
<b>FPH1</b>	(Flag Pole Holder)	
<b>TP</b>	(Tamper Proof Screws)	

**3 FINISHES**

\*Premium and Marine Grade Finish have additional charges


Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Architectural Bronze	51	51M
Cantaloupe	11	11M	Patina Verde	52	52M
Lilac	12	12M	Copper Clay	53	53M
Putty	13	13M	Silver	56	56M
Raw Unfinished	40	NA	Black Verde	61	61M
Black	41	41M	Painted Chrome	70	70M
Forest Green	42	42M	Painted Copper	71	71M
Bright Red	43	43M	Textured Black	72	72M
White	44	44M	Matte Black	73	73M
Bright Blue	45	45M	Textured Architectural Bronze	76	76M
Sunny Yellow	46	46M	Textured White	77	77M
Aqua Green	47	47M	Textured Silver	78	78M
Galvanized	49	NA		Premium Grade*	Marine Grade*
Navy	50	50M	Carbon Graphite	96	96M

Consult Factory for additional paint charges and availability.

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

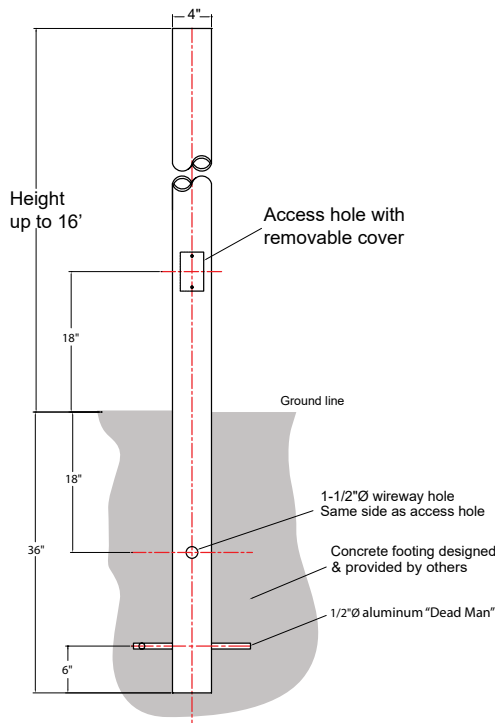

SMOOTH DIRECT BURIAL POLE OPTIONS			
Item Number	OD	Height	Wall
DB3S3	3"	3	0.125
DB3S4	3"	4	0.125
DB3S5	3"	5	0.125
DB3S6	3"	6	0.125
DB3S7	3"	7	0.125
DB3S8	3"	8	0.125
DB3S9	3"	9	0.125
DB3S10	3"	10	0.125
DB3S11	3"	11	0.125
DB3S12	3"	12	0.125
DB4S3	4"	3	0.125
DB4S4	4"	4	0.125
DB4S5	4"	5	0.125
DB4S6	4"	6	0.125
DB4S7	4"	7	0.125
DB4S8	4"	8	0.125
DB4S9	4"	9	0.125
DB4S10	4"	10	0.125
DB4S11	4"	11	0.125
DB4S12	4"	12	0.125
DB4S13	4"	13	0.125
DB4S14	4"	14	0.125
DB4S5	4"	5	0.188
DB4S6	4"	6	0.188
DB4S7	4"	7	0.188
DB4S8	4"	8	0.188
DB4S9	4"	9	0.188
DB4S10	4"	10	0.188
DB4S11	4"	11	0.188
DB4S12	4"	12	0.188
DB4S13	4"	13	0.188
DB4S14	4"	14	0.188
DB4S15	4"	15	0.188
DB4S16	4"	16	0.188

**Material**

Aluminum pole shall be extruded 6061-T6 aluminum. Available in 3" or 4" diameter. Wall thickness 0.125" or 0.188".

**Mounting**

Concrete footing designed and provided by others. A 1/2"Ø aluminum "Dead Man" is provided.

**Access**

All poles are provided with a hand access opening and cover. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request). 1-1/2"Ø wireway hole provided on same side as access hole.

**Grounding**

All poles are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4-20 stainless steel machine screw.

**Pole Height**

Maximum pole height is 16-feet.

**Accessories**


Banner arms, ladder rests, signage, flag pole holder and GFI receptacles are optional.

**Finish**

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity, and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

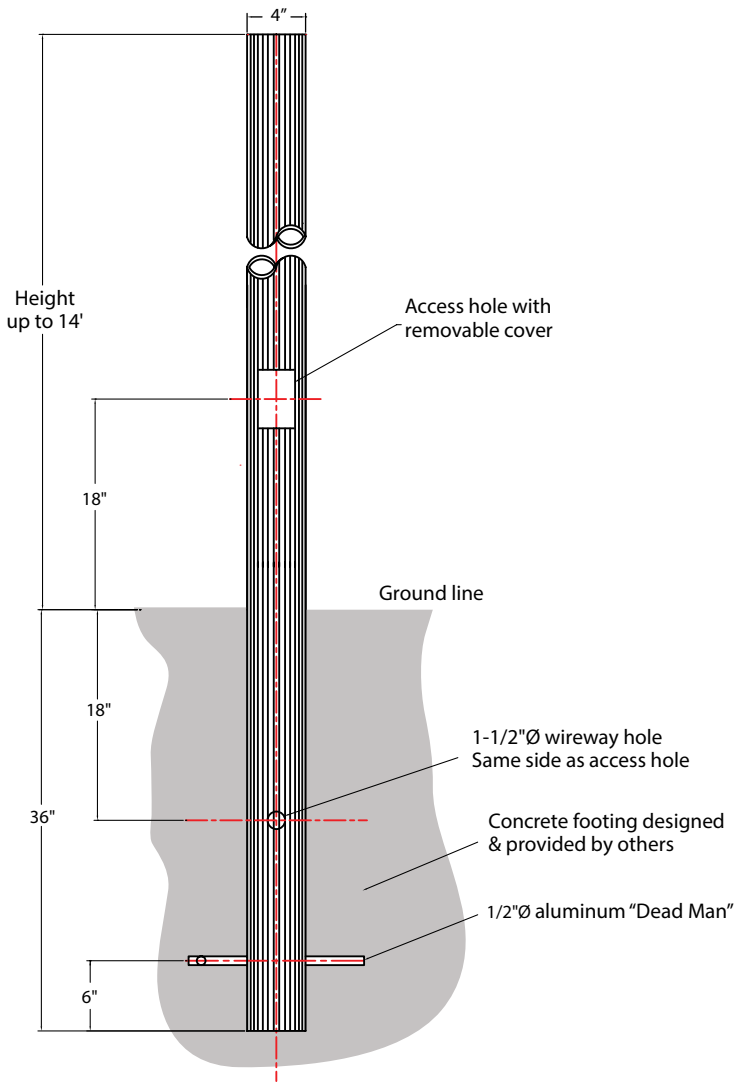

FLUTED DIRECT BURIAL POLE OPTIONS			
Item Number	OD	Height	Wall
DB3F6-.125	3.00"	6'	.125
DB3F7-.125	3.00"	7'	.125
DB3F8-.125	3.00"	8'	.125
DB3F9-.125	3.00"	9'	.125
DB3F10-.125	3.00"	10'	.125
DB4F8-.188	4.00"	8'	.188
DB4F9-.188	4.00"	9'	.188
DB4F10-.188	4.00"	10'	.188
DB4F11-.188	4.00"	11'	.188
DB4F12-.188	4.00"	12'	.188
DB4F13-.188	4.00"	13'	.188
DB4F14-.188	4.00"	14'	.188

**Material**

Aluminum pole shall be extruded 6061-T6 aluminum. Available in 3" or 4" diameter. Wall thickness 0.125" or 0.188".

**Mounting**

Concrete footing designed and provided by others. A 1/2"Ø aluminum "Dead Man" is provided.

**Access**

All poles are provided with a hand access opening and cover. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request) 1-1/2"Ø wireway hole provided on same side as access hole

**Grounding**

All poles are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4"-20 stainless steel machine screw.

**Pole Height**

Maximum pole height is 14-feet.

**Accessories**

Banner arms, ladder rests, signage, flag pole holder and GFI receptacles are optional.

**Finish**

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity, and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.