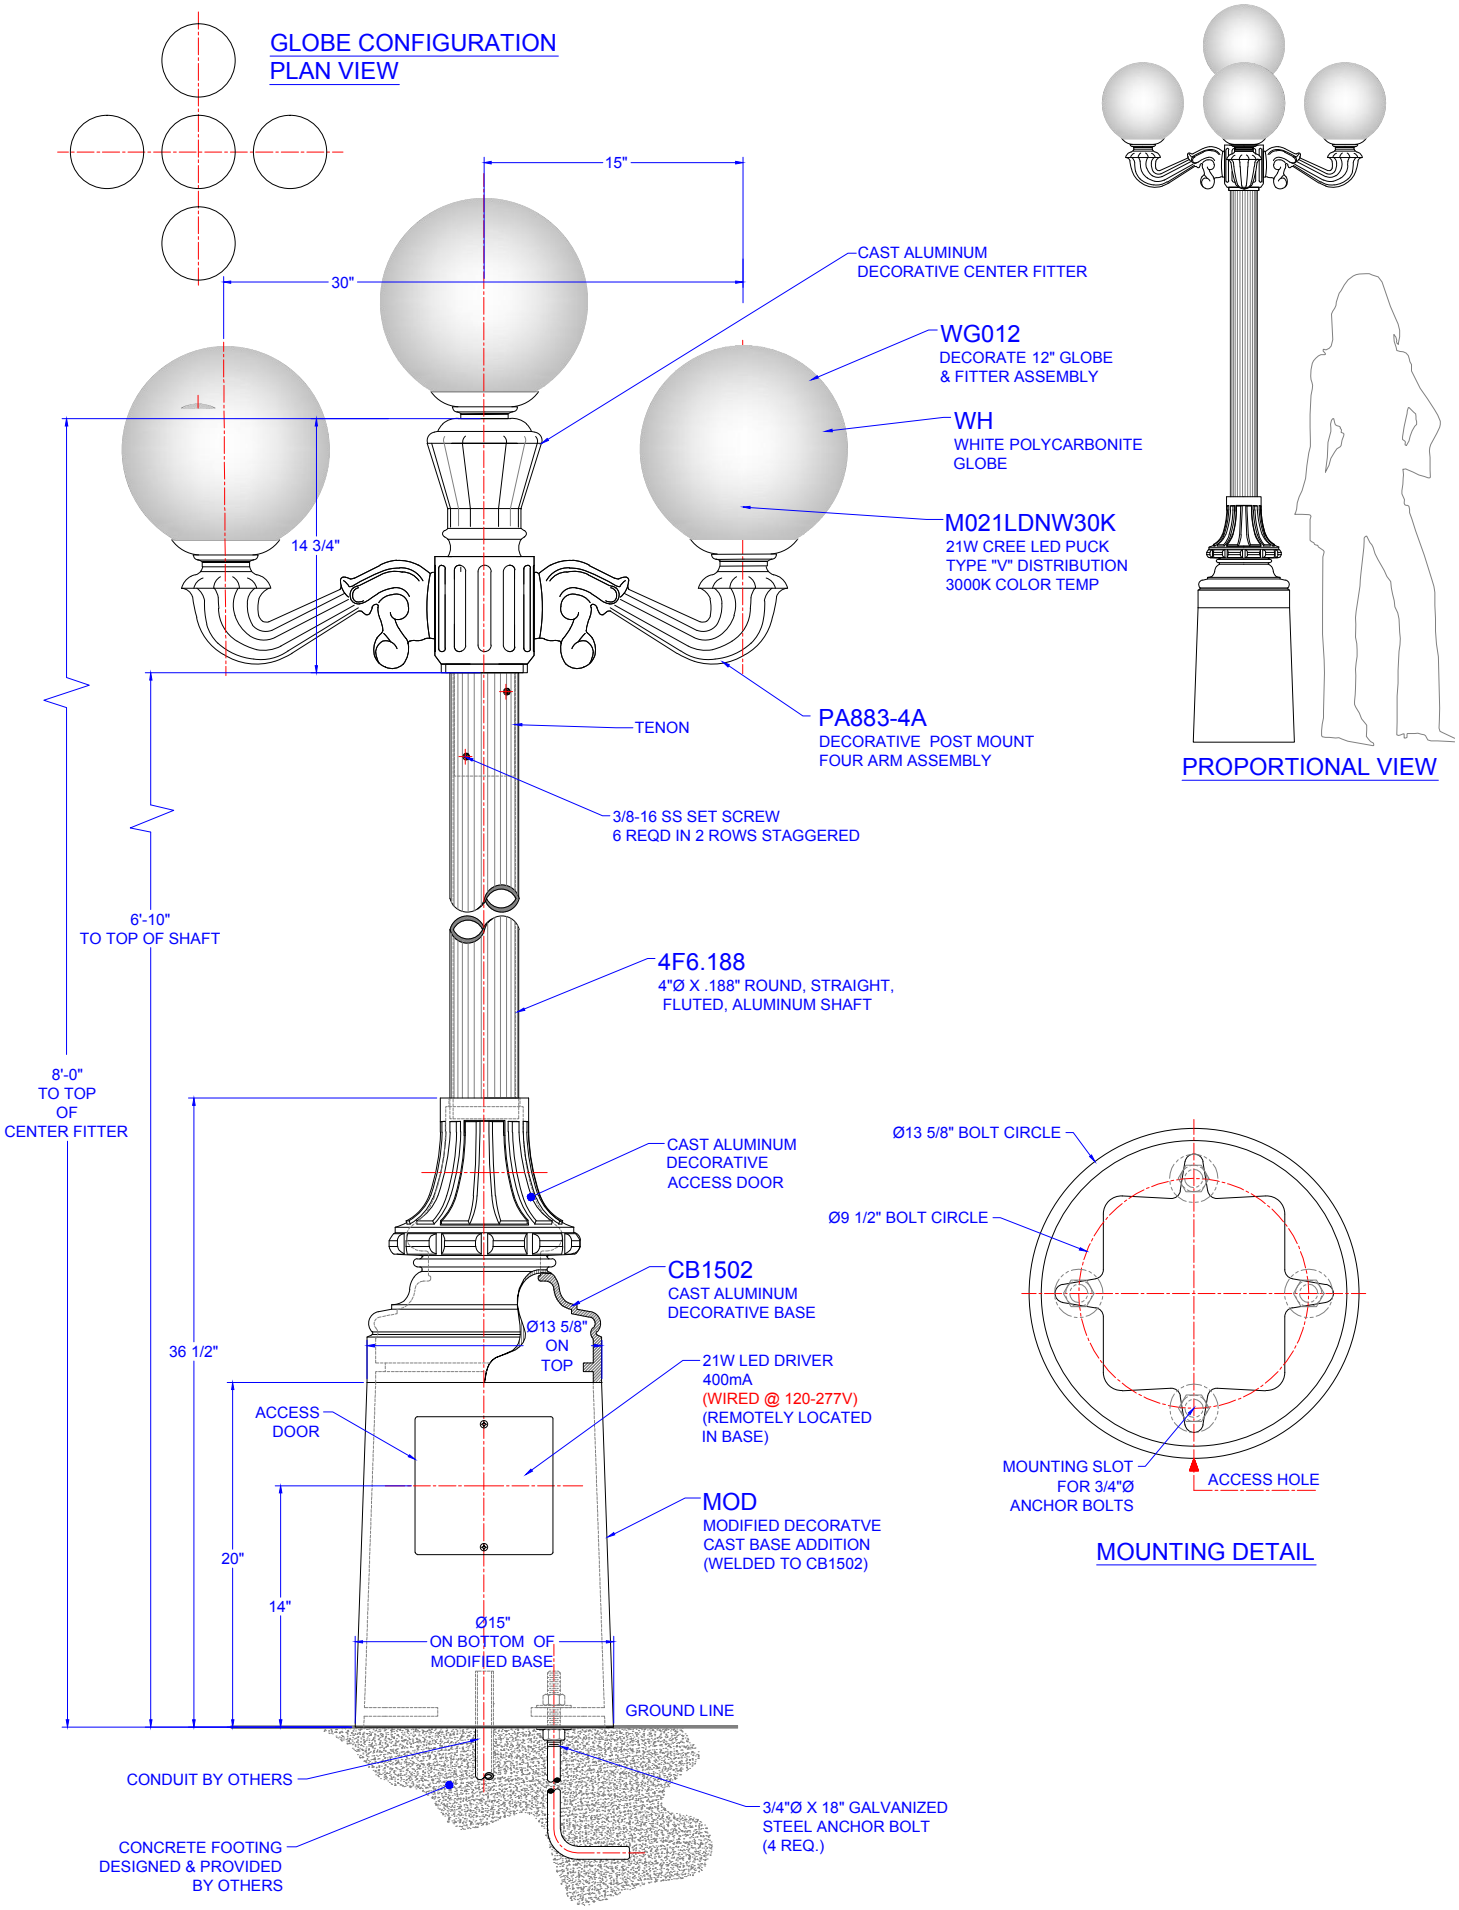
GLOBE CONFIGURATION
PLAN VIEW
15"
30"
CAST ALUMINUM
DECORATIVE CENTER FITTER
WG012
DECORATE 12" GLOBE
& FITTER ASSEMBLY
WH
WHITE POLYCARBONITE
GLOBE
M021LDNW30K
21W CREE LED PUCK
TYPE "V" DISTRIBUTION
3000K COLOR TEMP
14 3/4"
PA883-4A
DECORATIVE POST MOUNT
FOUR ARM ASSEMBLY
TENON
3/8-16 SS SET SCREW
6 REQD IN 2 ROWS STAGGERED
6'-10"
TO TOP OF SHAFT
4F6.188
4"Ø X .188" ROUND, STRAIGHT,
FLUTED, ALUMINUM SHAFT
8'-0"
TO TOP
OF
CENTER FITTER
CAST ALUMINUM
DECORATIVE
ACCESS DOOR
CB1502
CAST ALUMINUM
DECORATIVE BASE
Ø13 5/8"
ON
TOP
36 1/2"
21W LED DRIVER
400mA
(WIRED @ 120-277V)
(REMOTELY LOCATED
IN BASE)
ACCESS
DOOR
MOD
MODIFIED DECORATVE
CAST BASE ADDITION
(WELDED TO CB1502)
20"
14"
Ø15"
ON BOTTOM OF
MODIFIED BASE
GROUND LINE
CONDUIT BY OTHERS
CONCRETE FOOTING
DESIGNED & PROVIDED
BY OTHERS
3/4"Ø X 18" GALVANIZED
STEEL ANCHOR BOLT
(4 REQ.)
PROPORTIONAL VIEW
Ø13 5/8" BOLT CIRCLE
Ø9 1/2" BOLT CIRCLE
MOUNTING SLOT
FOR 3/4"Ø
ANCHOR BOLTS
ACCESS HOLE
MOUNTING DETAIL