
# **Bolt Down Square Steel Poles**

Quantity:

Illuminating

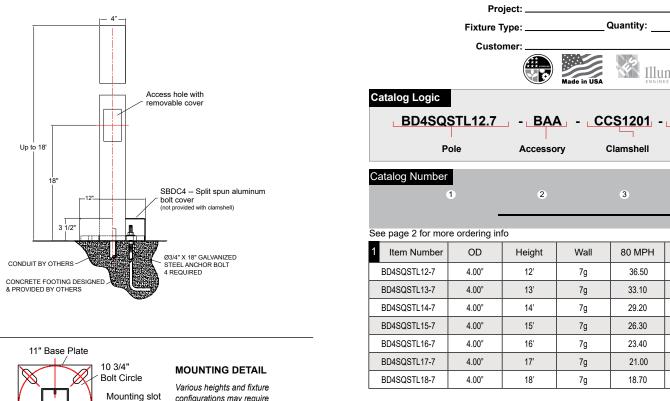

configurations may require

a different bolt circle. Consult

factory for specific bolt circle

required

Р	Pole		Accessory		Finish	
Catalog Number						
1		2		3	4	
	-					
See page 2 for mo	e ordering in	fo				
1 Item Number	OD	Height	Wall	80 MPH	100 MPH	
BD4SQSTL12-7	4.00"	12'	7g	36.50	20.00	
BD4SQSTL13-7	4.00"	13'	7g	33.10	18.00	
BD4SQSTL14-7	4.00"	14'	7g	29.20	16.00	
BD4SQSTL15-7	4.00"	15'	7g	26.30	14.40	
BD4SQSTL16-7	4.00"	16'	7g	23.40	12.80	
BD4SQSTL17-7	4.00"	17'	7g	21.00	11.70	
BD4SQSTL18-7	4.00"	18'	7g	18.70	10.90	

Project: \_

Fixture Type: \_\_\_\_ Customer:

# Material

One-piece non-tapered square shaft of low carbon steel (ASTM-A500 Grade B, 42,000 PSI min. yield) with one flush-welded vertical seam. Shaft is welded to a flat steel anchor base (ASTM-36, 36,000 PSI min. yield). Wall thickness is 7 guage.

for 3/4"

Access hole

anchor bolt.

4 required

### Mounting

Four anchor bolts provided are ¾"x18". Anchor bolts, nuts and washers are hot dipped galvanized steel. Spun aluminum bolt cover provided.

#### Access

All poles are provided with a hand access opening and cover. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request).

#### Grounding

All poles are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4-20 stainless steel machine screw.

# **Pole Height**

Maximum pole height is 18-feet.

#### Accessories

Banner arms, ladder rests, signage, flag pole holder and GFI receptacles are optional.

#### Finish

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity, and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

# Bolt Down Square Steel Poles

Project: \_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity

Customer: \_\_\_\_\_

<b>y</b> :	

_	
2	ACCESSORIES
GFI15 GFI20	(15 amp GFCI receptacle outlet) (20 amp GFCI receptacle outlet)
GFI-WPU	(20 amp GFCI receptacle with weather proof in-use cover)
BAA	(Cast Banner Arm A for 24" wide banner)
BAB	(Cast Banner Arm B for 30" wide banner)
BAC	(Cast Banner Arm C for 30" wide banner)
LR1	(Cast Ladder Rest 1)
LR3	(Cast Ladder Rest 3)
LR4	(Cast Ladder Rest 4)
LR5	(Cast Ladder Rest 5)
SIGN A	(Cast Sign A; 30" x 9", 8 letters/numbers on one line; requires Banner Arm to hang)
SIGN B	(Cast Sign B; 31" x 7", 12 letters/numbers on one line; requires Banner Arm to hang)
SIGN C	(Cast Sign C; 27" x 11", two rows of 8 letters/numbers on each line, requires Banner Arm to hang)
SIGN D	(Cast Sign D; 11" x 6 1/2", 4 letters/numbers on one line)
SIGN E	(Cast Sign E; comes with pole clamp, 24 1/2" x 6", 9 letters/ numbers on one line)
FPH1	(Flag Pole Holder)
ТР	(Tamper Proof Screws)
SBDC	(Split Bolt Cover)

3	2-PIECE CLA	MSHELLS
CCS0300	CCS1302	CCS2902
CCS0509	CCS1501	📥 CCS2903 🙍
CCS0701	CCS1502	CCS5301
CCS0702	CCS1504	CCS5401
CCS0900	CCS1509	CCS5509
CCS1100	CCS1607	CCS6303
CCS1201	凸 CCS1608	CCS6502
CCS1301	CCS1902	CCS9103 🪈

4 *Premium a	nd Marine		ISHES Finish have additio	nal char	qes
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade
Aspen Green	10	10M	Architectural Bronze	51	51N
Cantaloupe	11	11M	Patina Verde	52	52N
Lilac	12	12M	Copper Clay	53	53N
Putty	13	13M	Silver	56	56N
Raw Unfinished	40	NA	Black Verde	61	61
Black	41	41M	Painted Chrome	70	701
Forest Green	42	42M	Painted Copper	71	71N
Bright Red	43	43M	Textured Black	72	721
White	44	44M	Matte Black	73	731
Bright Blue	45	45M	Textured Architectural Bronze	76	761
Sunny Yellow	46	46M	Textured White	77	77N
Aqua Green	47	47M	Textured Silver	78	78
Galvanized	49	NA	PREMIUM FINISH	Preminum Grade*	Marir Grad
Navy	50	50M	Carbon Graphite	96	961
			Wood Grain	99	NA

© 2022 ANP Lighting. All rights reserved. These specifications are intended for general purposes only. ANP reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.