
Specifications CB0501



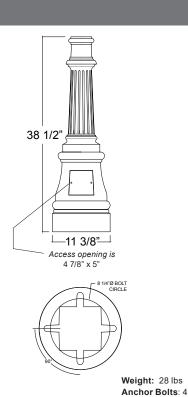

Project: _ Fixture Type: Quantity: _ Customer:

Specifications

All parts are durable 356 cast aluminum and high strength extruded aluminum.

Shafts are available in 3", and 4" diameter and wall thickness of .125 or .188.

All hardware provided shall be stainless steel or zinc plated steel.

Standard anchor bolts provided are 3/4" x 18" x 3". Bolts, nuts and washers shall be hot dipped galvanized steel .

Bolt pattern diameter is 8 1/4".

Access
Hand access opening and cover are provided in cast base. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request). See drawing for position

5 3/4" bottom hole provided for conduit



Grounding

All cast bases are provided with an All cast bases are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4-20 stainless steel machine

Pole Height

Maximum pole height is 14 feet.

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss

Modifications:Consult factory for custom or modified designs.

Catalog Logic

CB0501 Cast Base

4S14.188 Shaft

GFI20 -

72 Finish

Catalog Number

CB0501

2 3 1

Additional heights and pole diameters may be available. Contact factory for your specific needs.

| 1 Smooth Shaft Catalog No. | 1 Fluted Shaft Catalog No. | Shaft Diameter | Finished Height | Wall Thickness |
|----------------------------|----------------------------|-------------------|--------------------|-------------------|
| 3S8.125 | 3F8.125 | 3" | 8' | .125 |
| 3S9.125 | 3F9.125 | 3" | 9' | .125 |
| 3S10.125 | 3F10.125 | 3" | 10' | .125 |
| - | - | - | - | - |
| 3S10.188 | 3F10.188 | 3" | 10' | .188 |
| 3S11.188 | 3F11.188 | 3" | 11' | .188 |
| 3S12.188 | 3F12.188 | 3" | 12' | .188 |
| - | - | - | - | - |
| 4S8.125 | - | 4" | 8' | .125 |
| 4S9.125 | - | 4" | 9' | .125 |
| 4S10.125 | - | 4" | 10' | .125 |
| 4S11.125 | - | 4" | 11' | .125 |
| 4S12.125 | - | 4" | 12' | .125 |
| - | - | - | - | - |
| - | 4F8.188 | 4" | 8' | .188 |
| - | 4F9.188 | 4" | 9' | .188 |
| - | 4F10.188 | 4" | 10' | .188 |
| - | 4F11.188 | 4" | 11' | .188 |
| 4S12.188 | 4F12.188 | 4" | 12' | .188 |
| 4S13.188 | 4F13.188 | 4" | 13' | .188 |
| 4S14.188 | 4F14.188 | 4" | 14' | .188 |

| 2 | ACCESSORIES |
|-------------------------|---|
| GFI15 | (15 amp GFCI receptacle outlet) |
| GFI20 | (20 amp GFCI receptacle outlet) |
| GFI-WPU | (20 amp GFCI receptacle with weather proof in-use cover) |
| BAA | (Cast Banner Arm A for 24" wide banner) |
| BAB | (Cast Banner Arm B for 30" wide banner) |
| BAC | (Cast Banner Arm C for 30" wide banner) |
| LR1 | (Cast Ladder Rest 1) |
| LR3 | (Cast Ladder Rest 3) |
| LR4 | (Cast Ladder Rest 4) |
| LR5 | (Cast Ladder Rest 5) |
| SIGN A | (Cast Sign A; 30" x 9", 8 letters/numbers on one line; requires Banner Arm to hang) |
| SIGN B | (Cast Sign B; 31" x 7", 12 letters/numbers on one line; requires Banner Arm to hang) |
| SIGN C line, require | (Cast Sign C; 27" x 11", two rows of 8 letters/numbers on each ss Banner Arm to hang) |
| SIGN D | (Cast Sign D; 11" x 6 1/2", 4 letters/numbers on one line) |
| SIGN E numbers on | (Cast Sign E; comes with pole clamp, 24 1/2" x 6", 9 letters/ one line) YOUR SIGN |
| FPH1 | (Flag Pole Holder) |
| TP | (Tamper Proof Screws) |



Specifications CB0501

| Project: | | |
|---------------|-------------|----------------------------------|
| Fixture Type: | Quantity: _ | |
| Customer: | · | |
| | Made in USA | Illuminating ENGINEERING SOCIETY |

| Standard Grade | Marine Grade | | Standard Grade | Marine Grade | - |
|-------------------|-----------------|-------------------------|-------------------|-----------------|-------------------------------------|
| 40 | NA | Raw Unfinished | 53 | 100 | Copper Clay |
| 41 | 101 | Black | 56 | 109 | Silver |
| 42 | 102 | Forest Green | 61 | 106 | Black Verde |
| 43 | 114 | Bright Red | 70 | 118 | Painted Chrome |
| 44 | 107 | White | 71 | 105 | Painted Copper |
| 45 | 112 | Bright Blue | 72 | 108 | Textured Black |
| 46 | 123 | Sunny Yellow | 73 | 125 | Matte Black |
| 47 | 120 | Aqua Green | 76 | 121 | Textured Architectural Bronze |
| 49 | NA | Galvanized | 77 | 127 | Textured White |
| 50 | 111 | Navy | 78 | 124 | Textured Silver |
| 51 | 103 | Architectural Bronze | 10 | 130 | Aspen Green |
| 52 | 104 | Patina Verde | 11 | 131 | Cantaloupe |
| 12 | 133 | Lilac | 13 | 132 | Putty |
| Consu | ılt factor | v for additional pa | aint charges | and a | vailability |