

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____



Illuminating
ENGINEERING SOCIETY

Specifications

Material:
RLM shades are constructed of heavy duty spun aluminum. Wall back plate and ballast housing are cast aluminum. All fasteners are stainless steel. Inside of shade is reflective white finish for all colors except galvanized paint finish. Screw hardware may not match paint.

Glass:
Choice of clear, frosted or prismatic glass.

Ballasts:
Fluorescent Ballast will be electronic. Fluorescent sockets will be 4 pin to accept quad or triple tube lamps.


Electrical:
4-Pin Socket; Multi-tap 120v, 208v, 240v & 277v.

Finish:
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Certifications:
Cord mounts are UL Listed for dry locations. Arm mount, stem mount and wall mount are UL Listed for wet locations.


Modifications:
Consult factory for custom or modified luminaires.



D618
CFL

Weight: 2.5 lbs

Catalog Logic



Catalog Number						
1	2	3	4	5	6	7
D618	42WPL	RTC	WHC	200GLFRGUP		
1 LIGHT SOURCE & WATTAGES	2 BALLAST HOUSING	3 MOUNTING SOURCES	4 GLASS & GUARD			
Flourescent (CFL)	Flourescent (CFL)	Arm Mounts (Cast Back Plate (CB) Included)	Up to 100w Options			
GU24 Socket Option	RTC (CFL Ballast Canopy)	E3 E4 E5 E6 E8 E9	100GLCL (Clear Glass)			
26WPL	RTCNC (CFL Ballast Canopy/No Spun Cover)	E10 E11 E12 E13 E18	100GLFR (Frosted Glass)			
32WPL	DBH (Dimming CFL Ballast Housing)	E19 E25	100GLPR (Prismatic Glass)			
42WPL (100GL or AC glass not available)		(See Step 2 for Ballast Housing Options)	100GLCLGUP (Clear Glass & Small Wire Guard)			
26CFLDIM		Wall Mounts	100GLFRGUP (Frosted Glass & Small Wire Guard)			
32CFLDIM		WM40	100GLPRGUP (Prismatic Glass & Small Wire Guard)			
42CFLDIM (100GL or AC glass not available)		WM54	100GLCLGUPC (Clear Glass & Cast Guard)			
(Compact Fluorescent dimming is 0-10v and ballast must be located within 12" of lamp)		WM74 (CFL Only)	100GLFRGUPC (Frosted Glass & Cast Guard)			
		WM75 (HID Only)	100GLPRGUPC (Prismatic Glass & Cast Guard)			
		WM317 (CFL Only)	100GLGUP (Small Wire Guard with No Glass)			
		WM84	100GLGUPC (Cast Guard with No Glass)			
		Post Mounts (Postline ballast only; 4" OD pole required)	AC (Stipple Glass Acorn)			
		PM10	100GLBG (White Ball Glass)			
		PM20	Up to 200w Options			
		PM30	200GLCL (Clear Glass)			
		PM40	200GLFR (Frosted Glass)			
		PM50	200GLPR (Prismatic Glass)			
		PM319	200GLCLGUP (Clear Glass & Large Wire Guard)			
		Cord Mounts	200GLFRGUP (Frosted Glass & Large Wire Guard)			
		BLC (6' black cord with 1" x 5 3/8" canopy)	200GLPRGUP (Prismatic Glass & Large Wire Guard)			
		WHC (6' white cord with 1" x 5 3/8" canopy)	200GLCLGUPC (Clear Glass & Large Cast Guard)			
		Stem Mounts	200GLFRGUPC (Frosted Glass & Large Cast Guard)			
		1/2" (13/16" OD Rigid Stems with STC Flat Canopy)	200GLPRGUPC (Prismatic Glass & Large Cast Guard)			
		2ST6 2ST12 2ST18 2ST24 2ST36 2ST48	200GLGUP (Large Wire Guard with No Glass)			
		2ST60 2ST72 2ST96	200GLGUPC (Large Cast Guard with No Glass)			
		3/4" (1" OD Rigid Stems with STC Flat Canopy)				
		3ST6 3ST12 3ST18 3ST24 3ST36 3ST48				
		3ST60 3ST72 3ST96				
		(See Step 2 for Ballast Housing Options)				

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____

5 ACCESSORIES	
EMG-CFL	(CFL Emergency Ballast, remote placement)
GR18	(18" Wire Grill)

6 VOLTAGES			
120	208	240	277

WARRANTY

See www.anplighting.com for complete fixture warranty.

7 FINISHES					
Standard Grade	Marine Grade		Standard Grade	Marine Grade	
40	NA	Raw Unfinished	53	100	Copper Clay
41	101	Black	56	109	Silver
42	102	Forest Green	61	106	Black Verde
43	114	Bright Red	70	118	Painted Chrome
44	107	White	71	105	Painted Copper
45	112	Bright Blue	72	108	Textured Black
46	123	Sunny Yellow	73	125	Matte Black
47	120	Aqua Green	76	121	Textured Architectural Bronze
49	NA	Galvanized	77	127	Textured White
50	111	Navy	78	124	Textured Silver
51	103	Architectural Bronze	10	130	Aspen Green
52	104	Patina Verde	11	131	Cantaloupe
12	133	Lilac	13	132	Putty
Premium Grade	Marine Grade		Premium Grade	Marine Grade	
81	129	Extreme Chrome	64	116	Candy Apple Red
80	117	Textured Desert Stone	65	122	Cobalt Blue
67	119	Butterscotch	82	128	Graystone
66	115	Caramel	69	113	Gunmetal Gray
68	126	Black Silver	83	134	Oil Rubbed Bronze


Consult factory for additional paint charges and availability

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____


ARM MOUNTS | Dimensions are Projection x Height | CB included with all arms

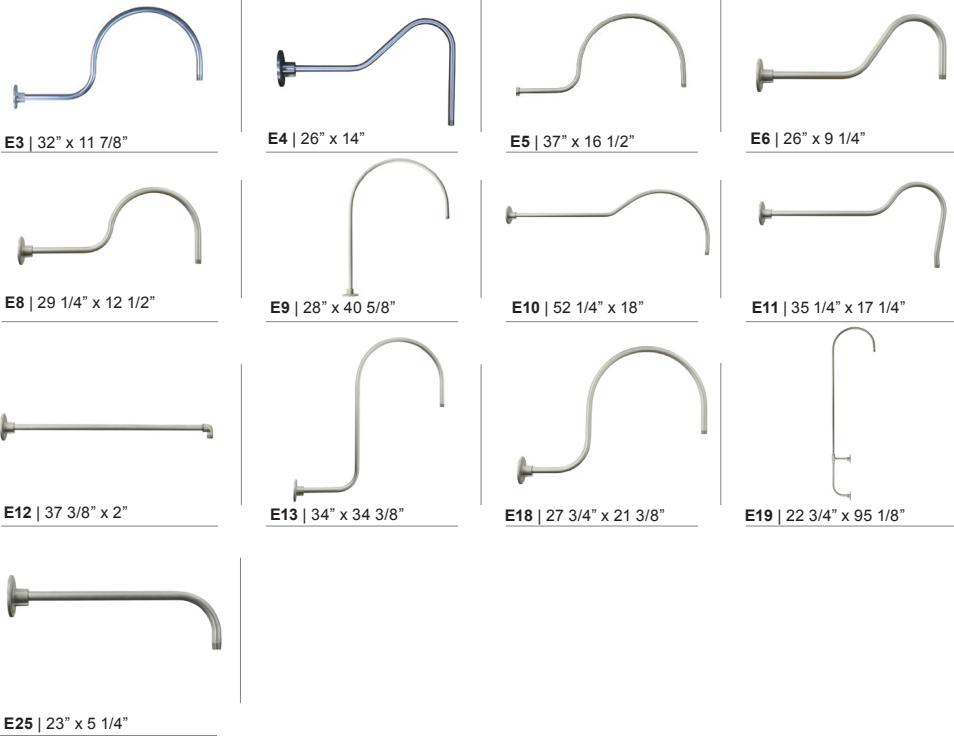









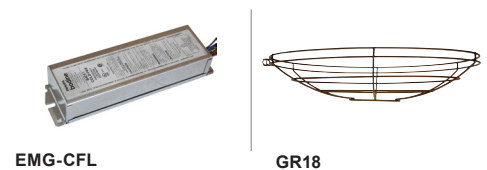

WALL MOUNTS | Dimensions are Projection x Height | **POST MOUNTS** | Dimensions are Projection x Height



ACCESSORIES



GLASS & GUARDS

Glass Legend: CL = Clear FR = Frosted PR = Prismatic	
Glass Only	
	GLCL GLFR GLPR
	AC (Acorn Glass -- Clear Stipple Only)
	GLBG (Ball Glass -- White Only)
Glass with Cast Guard	
	GLCLGUPC GLFRGUPC GLPRGUPC
Glass with Wire Guard	
	GLCLGUP GLFRGUP GLPRGUP
Guards Only	
	GLGUPC (Cast Guard)
	GLGUP (Wire Guard)
Ballast & Driver Housing	
	RTC
	RTCNC
	DBH