



Project Name: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

RPL12

RPL18

PENDANT



P-RPL12



P-RPL18

FLUSH MOUNT



F-RPL1201



F-RPL18

Specifications

**Material:**  
 RLM shades are constructed of 12 gauge 1100 series spun aluminum. Wall back plate and driver housing are cast aluminum, some types include a spun metal cover. All fasteners are stainless steel. Some washers may be galvanized. Screw hardware may not match paint.

**Diffusion Globe:**  
 Diffusion globe creates a comfortable, uniform light distribution. UV-stabilized rotationally molded polyethylene with a wall thickness of 3-3.5 mm. Optical Performance: Light transmission approximately 50% of initial.

**Drivers:**  
 Universal voltage 120-277V is standard. 0-10V, TRIAC and ELV dimming to 1% protocols are standard for LED modules. (Refer to Driver Specification section for other specifications.)

**Electrical:**  
 Approximately 8" of pull wire extends from luminaire. All luminaires are prewired with 0-10V dimming leads. Post Arms and Wall Mounts are also prewired with line voltage & dimming leads.

**Certifications:**  
 Cord mounts are UL Listed for dry locations. Arm Mount, stem mount and wall mount/ flush mount are UL Listed for wet locations.


**Finish:**  
 A polyester powder coat high quality finish. Marine grade finish is available.

**Modifications:**  
 Consult factory for custom or modified designs.

**Buy American:**  
 This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

RPL Standard LED

Weight: RPL12 - 4 lbs  
 RPL18 - 9 lbs

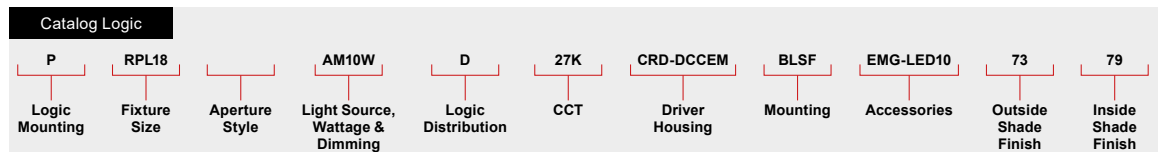

Project Name: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

Catalog Number	1	2	3	4	5	6	7	8	9	10	11
----------------	---	---	---	---	---	---	---	---	---	----	----

1	MOUNTING STYLE
P	(Pendant)
F	(Flush Mount/ Wall Mount)

2	FIXTURE SIZE
RPL12	(20W MAX)
RPL18	

3	APERTURE STYLE
N/A	Standard Rippled Design (leave blank if selecting standard)
01	Flat Plate Design
*While ripple is offered on the 12", we recommend flat plate (01) for best visual proportions*	

4	LIGHT SOURCE & WATTAGES
AM10W	(10W ANP Module COB)
AM20W	(20W ANP Module COB)
AM30W	(30W ANP Module COB)

5	DISTRIBUTION
D	(Domed Acrylic Wide Distribution Lens)

6	CCT (COLOR TEMPERATURE)
27K	(2700K)
30K	(3000K)
35K	(3500K)
40K	(4000K)
50K	(5000K) Consult Factory

7	DRIVER HOUSINGS
(Driver Housing only Required with Color Cord and/or Emergency Backup Options)	
NA	No selection is required if Color Cord or Emergency Backup are not chosen
<b>Color Cord Driver Housing Options Choose Color Cord Style in Box 8</b>	
CRD-DCC	(Driver Housing for Color Cord only; 7-3/4" x 1-1/2")
SSC-DCC	(Driver Housing for SS Cable/Color Cord only; 7-3/4" x 1-1/2")

7	DRIVER HOUSINGS
<b>Emergency Backup Driver Housing Options Choose EMG Driver in Box 9</b>	
CRD-DCCEM-BLC	(Emergency Ballast Housing for Black Cord only; 12" x 1-1/2")
CRD-DCCEM-WHC	(Emergency Ballast Housing for White Cord only; 12" x 1-1/2")
CRD-DCCEM	(Emergency Ballast Housing for Color Cord only; 12" x 1-1/2")
ST-DCCEM	(Emergency Ballast Housing for Stem only; 12" x 1-1/2")
SSC-DCCEM-BLC	(Stainless steel cable with 6-foot black cord and 12" canopy)
SSC-DCCEM-WHC	(Stainless steel cable with 6-foot white cord and 12" canopy)
SSC-DCCEM	(Emergency Ballast Housing for SS Cable/Color Cord only; 12" x 1-1/2")
<b>*Driver Housing finish will match fixture finish.</b>	

8	PENDANT MOUNTING SOURCES*
N/A	Leave blank if Flush Mount was chosen in box 1
<b>Stainless Steel Cable Mounts (See page 4 for color cord style)</b>	
SSC-BLC-5W	(Stainless steel cable with 6-foot black cord and 5-3/8" canopy)
SSC-WHC-5W	(Stainless steel cable with 6-foot white cord and 5-3/8" canopy)
<b>Cord Mounts (See page 4 for color cord style)</b>	
N/A	No Selection Required if: CRD-DCCEM-BLC; CRD-DCCEM-WHC; SSC-DCCEM-BLC or SSC-DCCEM-WHC is chosen in Box 7.

SJT Cord	
BLC-5W (6' Black 5-wire SJT Cord)	WHC-5W (6' White 5-wire SJT Cord)
Solid Fabric Colored Cords Must Choose DCC Housing in Box 7	
BLSF (6' Black)	KGSF (6' Kelly Green)
ORSF (6' Orange)	WHSF (6' White)
GYSF (6' Gray)	CBSF (6' Cobalt Blue)
LGSF (6' Lime Green)	CASF (6' Cardinal)
CHSF (6' Chocolate Brown)	SBSF (6' Sky Blue)

Patterned Fabric Colored Cords Must Choose DCC Housing in Box 7	
BWHPF (6' Black/White Houndstooth)	NMTPF (6' Navy Mini Tweed)
BIHPP (6' Brown/Ivory Houndstooth)	
Glossy Fabric Colored Cords Must Choose DCC Housing in Box 7	
GMGF (6' Gun Metal)	BRGF (6' Bronze)
SSGF (6' Sterling Silver)	GOGF (6' Gold)
CPGF (6' Copper Penny)	

Stem Mounts	
1/4" (1/2" OD Stems with 45° Swivel Flat Canopy)	1/4" (1/2" OD Rigid Stems with Flat Canopy)
1STS6 1STS12 1STS18 1STS24 1STS36 1STS48	1STR6 1STR12 1STR18 1STR24 1STR36
1STS60 1STS72 1STS96	1STR48 1STR60 1STR72 1STR96
<b>*Arm mount, Wall mount or Stem finish will match fixture finish.</b>	

9	MOUNTING ACCESSORIES
EMG-LED06	(6W, LED Emergency Driver, DCCEM Placement, ANP Module Only)
EMG-LED10	(10W, LED Emergency Driver, DCCEM Placement, ANP Module Only)
EMG-LED16	(16W, LED Emergency Driver, DCCEM Placement, ANP Module Only)
EMG-LED20	(20W, LED Emergency Driver, DCCEM Placement, ANP Module Only)
EMG-LEDR05	(5W, LED Emergency Driver, Remote Placement up to 25', ANP Module Only, Provided with Flexible Conduit)
EMG-LEDR7.8	(7.8W, LED Emergency Driver, Remote Placement up to 25', ANP Module Only, Provided with Flexible Conduit)
EMG-LEDR10.7	(10.7W, LED Emergency Driver, Remote Placement up to 25', ANP Module Only, Provided with Flexible Conduit)
EMG-LEDR17	(17W, LED Emergency Driver, Remote Placement up to 25', ANP Module Only, Provided with Flexible Conduit)
<b>*Most EM Packs are remote mount only (consult factory). For percent lumens in emergency mode, see Technical Section at <a href="http://www.ANPlighting.com">www.ANPlighting.com</a></b>	
<b>**Accessory finish will match fixture finish.</b>	

10 11	FINISHES				
<i>*Premium and Marine Grade Finish have additional charges</i>					
Standard Colors	Standard Grade	Marine Grade*	Premium Colors	Premium Grade*	Marine Grade*
Aspen Green	10	10M	High Gloss Black	01	01M
Cantaloupe	11	11M	Arctic Silver	14	14M
Lilac	12	12M	Candy Apple Red	64	64M
Putty	13	13M	Cobalt Blue	65	65M
Raw Unfinished	40	NA	Caramel	66	66M
Black	41	41M	Butterscotch	67	67M
Forest Green	42	42M	Black Silver	68	68M
Bright Red	43	43M	Gunmetal Gray	69	69M
White	44	44M	Mayan Gold	79	NA
Bright Blue	45	45M	Textured Desert Stone	80	80M
Sunny Yellow	46	46M	Extreme Chrome	81	81M
Aqua Green	47	47M	Graystone	82	82M
Galvanized	49	NA	Oil Rubbed Bronze	83	83M
Navy	50	50M	Carbon Graphite	96	96M
Architectural Bronze	51	51M			
Patina Verde	52	52M			
Copper Clay	53	53M			
Silver	56	56M			
Black Verde	61	61M			
Painted Chrome	70	70M			
Painted Copper	71	71M			
Textured Black	72	72M			
Matte Black	73	73M			
Textured Architectural Bronze	76	76M			
Textured White	77	77M			
Textured Silver	78	78M			
<b>Consult Factory for additional paint charges and availability.</b>					

Project Name: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

**PERFORMANCE TABLE - ANP MODULE - INITIAL LUMENS**

LED CATALOG	WATTS	DISTRIBUTION	2700K				3000K				3500K				4000K							
			INITIAL LUMENS	lm/W	B	U	G	INITIAL LUMENS	lm/W	B	U	G	INITIAL LUMENS	lm/W	B	U	G	INITIAL LUMENS	lm/W	B	U	G
AM10W	10W	TYPE V	847	85	1	0	0	888	89	1	0	0	899	90	1	0	0	910	91	1	0	0
AM20W	20W	TYPE V	1694	85	1	0	0	1777	89	1	0	0	1799	90	1	0	0	1820	91	1	0	0
AM30W	30W	TYPE V	2541	85	1	0	0	2665	89	1	0	0	2698	90	1	0	0	2730	91	1	0	0

**MODULE SPECIFICATION**

- CREE XLAMP CMU
- Typical Efficacy 90 lm/W
- CCT: 2700K, 3000K, 3500K, 4000K
- CRI: >90 MIN (92 TYP)
- 3-Step Ellipse
- Certifications: UL Recognized, RoHS, ENEC, REACH

**DRIVER SPECIFICATION**

- Universal Input: 120-277V
- Dimming: 0-10V, TRIAC, ELV (Dims to 1%)
- Power Factor @ Full Load >90%
- THD @ Full Load <20%
- Constant Current Output 50/60Hz
- Operating Temperature: -30 C Minimum
- Lifetime: >50,000 hours
- Ingress Protection: IP66
- Certifications: UL Recognized, CE, CA Title 24, FCC, DLC

**FINISHES**

- A polyester powder coat high quality finish is electro-statically applied and baked at 430°F for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**WARRANTY**

See [www.ANPlighting.com](http://www.ANPlighting.com) for complete fixture warranty.

**LED warranty information**

- 5 year limited warranty\*
- \*Limited Warranty: A typical year is defined as 4,380 hours of operation.

**DRIVER HOUSINGS**



**CRD-DCC**  
(7-3/4" x 1-1/2") Cord Only



**SSC-DCC**  
(7-3/4" x 1-1/2") Cable/Cord Only



**CRD-DCCEM**  
(12" x 1-1/2") Cord Only



**SSC-DCCEM**  
(12" x 1-1/2") Cable/Cord Only



**ST-DCCEM**  
(12" x 1-1/2") Stem Only

Project Name: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

**SOLID FABRIC COLORED CORDS** All fabric Color Cords are three conductor, 1/4" diameter




GYSF | Gray



CHSF | Chocolate Brown



WHSF | White



CASF | Cardinal



LGSF | Lime Green



KGSF | Kelly Green



CBSF | Cobalt Blue



SBSF | Sky Blue

**PATTERNED FABRIC COLORED CORDS** All fabric Color Cords are three conductor, 1/4" diameter



BIHPF | Brown/Ivory Houndstooth



GYCPF | Gray/Citrus Yellow



MOSPF | Magenta/Orange Stripe



NMTPF | Navy Mini Tweed

**GLOSSY FABRIC COLORED CORDS** All fabric Color Cords are three conductor, 1/4" diameter



SSGF | Sterling Silver



CPGF | Copper Penny



BRGF | Bronze




GOGF | Gold

**FINISHES COLORS**

**STANDARD**



**PREMIUM**

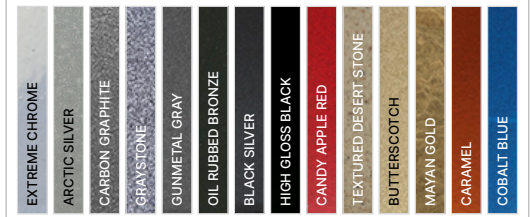


Project Name: \_\_\_\_\_


Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_


**LINE DRAWING**

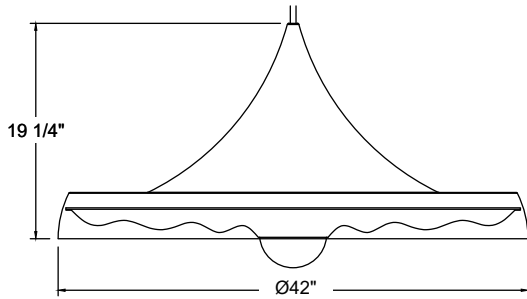


**P-RPL42**

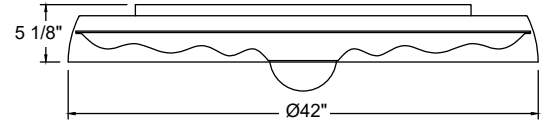


**F-RPL42**

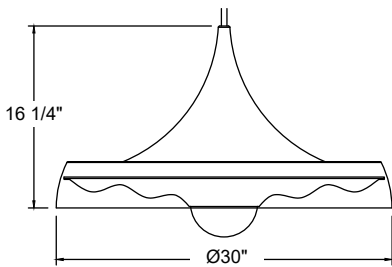


**P-RPL30**




**F-RPL30**




**P-RPL24**




**F-RPL24**




**P-RPL18**



**F-RPL18**



**P-RPL12**



**F-RPL12**