



SLW09



SLW09-EM



Specifications

Material: Durable A356 cast aluminum, aluminum sheet metal, and galvanized steel sheet metal. Hardware is stainless steel or zinc-plated steel.

Lens: PMMA Optical Lens

Fixture Mounting: Mounts to non-combustible material over 4" standard Junction Box (others). Downlight only.

Drivers: Universal Voltage 120-277V is standard. 0-10V dimming is standard. (Refer to Driver Specification section for other specifications.)

Dark Sky Friendly: To maintain dark sky friendly compatibility: ≤ 3000K

Electrical: Approximately 12" of pull wire extends from luminaire.

Finish: A polyester powder coat high quality finish. Marine grade finish is available.

Modifications: Consult factory for custom or modified designs.


Certifications: UL Listed for outdoor, wet location. LED is IP66.

Buy American: This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

SLW09

Weight: 4 lbs.

Catalog Logic



Catalog Number	1	2	3	4	5	6	7	8
SLW09						-	-	-

1 WALL MOUNT STYLE
(-) Leave Blank For Standard
EM (Integral Emergency Driver Option)

2 LIGHT SOURCE & WATTAGES
A010LD2 (10W LED Array)
A018LD4 (18W LED Array)
A032LD8 (32W LED Array)
*See LED Performance Charts for distribution type compatibility.

3 OPTICS
T2 (Type II)
T3 (Type III)
T4 (Type IV)
T5 (Type V)

4 CCT (COLOR TEMPERATURE)
27K (2700K)
30K (3000K)
35K (3500K)
40K (4000K)
AMB (True Amber 590nm)
*Consult Factory for 5000K

5 ACCESSORIES
EMG-LED06 (6W LED Emergency Driver)
EMG-LED10 (10W LED Emergency Driver)
EMG-LED16 (16W LED Emergency Driver)
EMG-LED20 (20W LED Emergency Driver)
PC (Button Photo Cell)
*Emergency Driver is integral to luminaire. See drawing on last page for SLW09-EM. For percent lumens in emergency mode, see Technical Section

6 FINISHES					
*Premium and Marine Grade Finish have additional charges					
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Copper Clay	53	53M
Cantaloupe	11	11M	Silver	56	56M
Lilac	12	12M	Black Verde	61	61M
Putty	13	13M	Painted Chrome	70	70M
Raw Unfinished	40	NA	Painted Copper	71	71M
Black	41	41M	Textured Black	72	72M
Forest Green	42	42M	Matte Black	73	73M
Bright Red	43	43M	Textured Architectural Bronze	76	76M
White	44	44M	Textured White	77	77M
Bright Blue	45	45M	Textured Silver	78	78M
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*
Aqua Green	47	47M	Textured Desert	80	80M
Galvanized	49	NA	Graystone	82	82M
Navy	50	50M	Oil Rubbed Bronze	83	83M
Architectural Bronze	51	51M	Carbon Graphite	96	96M
Patina Verde	52	52M			

Consult Factory for additional paint charges and availability.

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

PERFORMANCE TABLE - 12 LED ARRAY - DELIVERED LUMENS

LED CATALOG	WATTS	DISTRIBUTION	AMBER				2700K				3000K				3500K				4000K								
			DELIVERED LUMENS	lm/W	B	U	G	DELIVERED LUMENS	lm/W	B	U	G	DELIVERED LUMENS	lm/W	B	U	G	DELIVERED LUMENS	lm/W	B	U	G					
A010LD2	10W	TYPE I	503	50	0	0	0	1015	102	1	0	1	1110	111	1	0	1	1169	117	1	0	1	1192	119	1	0	1
		TYPE II	519	52	0	0	0	1034	103	1	0	1	1131	113	1	0	1	1190	119	1	0	1	1214	121	1	0	1
		TYPE III	483	48	0	0	0	1038	104	0	0	1	1135	113	0	0	1	1194	119	0	0	1	1218	122	0	0	1
		TYPE V	479	48	0	0	0	956	96	1	0	1	1123	112	1	0	1	1182	118	1	0	1	1206	121	1	0	1
A018LD4	18W	TYPE I	906	50	1	0	1	2843	102	2	0	2	3109	111	2	0	2	3272	117	2	0	2	3338	119	2	0	2
		TYPE II	934	52	0	0	0	2895	103	1	0	1	3166	113	1	0	1	3332	119	1	0	1	3400	121	1	0	1
		TYPE III	869	48	0	0	0	2905	104	1	0	1	3177	113	1	0	1	3344	119	1	0	1	3411	122	1	0	1
		TYPE V	862	48	1	0	0	2678	96	2	0	1	3145	112	2	0	1	3310	118	2	0	1	3377	121	2	0	1
A032LD8	32W	TYPE I	1610	50	1	0	1	3249	102	2	0	2	3553	111	2	0	2	3739	117	2	0	2	3815	119	2	0	2
		TYPE II	1660	52	1	0	1	3309	103	1	0	1	3619	113	1	0	1	3808	119	1	0	1	3886	121	1	0	1
		TYPE III	1545	48	1	0	1	3320	104	1	0	1	3631	113	1	0	1	3821	119	1	0	1	3899	122	1	0	1
		TYPE V	1532	48	1	0	0	3061	96	2	0	1	3594	112	2	0	1	3782	118	2	0	1	3859	121	2	0	1

MODULE SPECIFICATION

- PMMA Optical Lens
- 12 High-power LEDs
- Distributions: Type I, II, III, V
- CCT: 2700K, 3000K, 3500K, 4000K
- CRI: >90
- Certifications: UL Recognized, RoHS, REACH

DRIVER SPECIFICATION

- Universal Input 120-277V
- Dimming: 0-10V, TRIAC, ELV (Dims to 1%)
- Power Factor @ Full Load >90%
- THD @ Full Load <20%
- Constant Current Output 50/60Hz
- Operating Temperature: -30°C Minimum (32W is -10° Minimum)
- Lifetime: >50,000 hours
- Ingress Protection: IP66
- Certifications: UL Recognized, CE

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray and is available in either a textured or gloss surface. 5-year warranty for aluminum products. 2-year warranty for steel products.

WARRANTY

See www.ANPlighting.com for complete fixture warranty.

LED warranty information

- 5 year limited warranty*
- *Limited Warranty: A typical year is defined as 4,380 hours of operation.

ACCESSORIES



EMG-LED10, 20




PC

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

PHOTOMETRIC DISTRIBUTION - 12 LED ARRAY

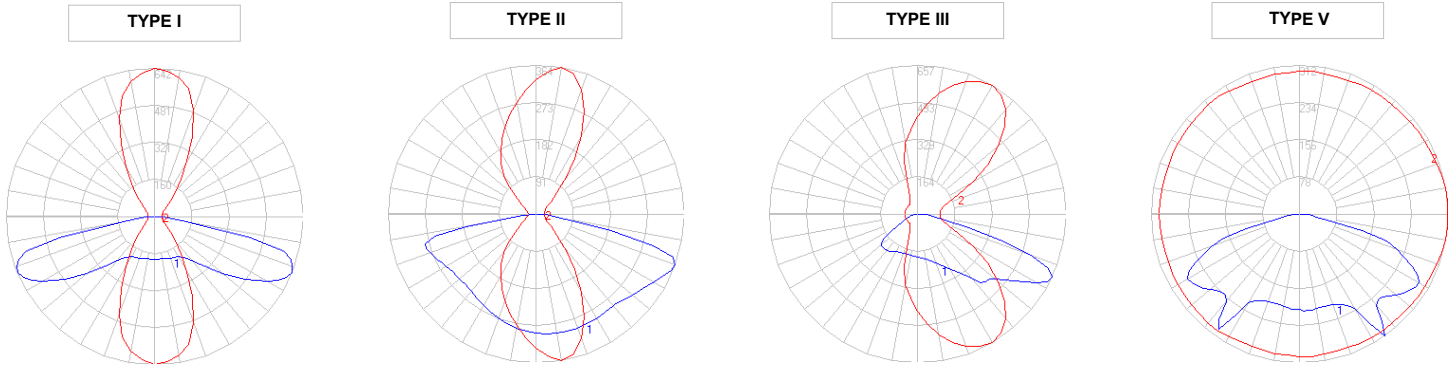

FINISHES COLORS



SLW09-EM

